

GROUND SYSTEMS DEVELOPMENT STANDARD

EAR 99 -- NO LICENSE REQUIRED

The information contained in the document is technical in content, but not technical data as defined by the International Traffic in Arms Regulations (ITAR) or the Export Administration Regulations (EAR), and therefore is EAR 99 NLR, no export license required, suitable for public release. [General Prohibition Six (Embargo) applies to all items subject to the EAR, i.e. items on the CCL and within EAR 99 NLR. You may not make an export or re-export contrary to the provisions of part 746 (Embargos and Other Special Controls) of the EAR and 22 CFR part 126.1 of the ITAR].

EDDR # 126419 NASA KSC Export Control Office (321-867-9209)

March 18, 2019

Engineering Directorate

National Aeronautics and
Space Administration
John F. Kennedy Space Center



KSC FORM 16-12 06/95 (1.0) PREVIOUS EDITIONS MAY BE USED

APPROVED FOR PUBLIC RELEASE – DISTRIBUTION IS UNLIMITED

GROUND SYSTEMS DEVELOPMENT STANDARD

Approved by:



Shawn Quinn
Director, Engineering

March 18, 2019

RECORD OF REVISIONS/CHANGES

REV LTR	CHG NO.	DESCRIPTION	DATE
		Basic issue.	January 1983
A		General revision.	March 1986
	A-1	Added requirements for SCAPE suit operations and EMI compatibility.	February 20, 1987
B		General revision.	June 1988
	B-1	Added requirements for marking of test weights.	July 26, 1991
C		General revision.	March 10, 1993
D		Miscellaneous changes.	August 5, 1994
	D-1	Added requirements for design of facility premises wiring.	December 15, 1994
E		Added requirements for instrumentation calibration and quick release pins.	June 1, 1995
F		Revised miscellaneous references.	August 5, 1996
G		Updated miscellaneous references and text.	December 18, 1998
H		Updated miscellaneous references and text.	September 14, 2000
	H-1	Revised 3.3.3.2.13.	May 30, 2002
J		Updated miscellaneous references and text. Incorporated change H-1.	October 15, 2002
K		Updated miscellaneous references and text. All pages reformatted.	September 30, 2004
L		Complete rewrite and align with NASA-STD-5005.	February 29, 2012
	L-1	Updated reference documents, abbreviations, and terms.	February 28, 2013
	L-2	Updated reference documents, abbreviations, and terms.	June 23, 2014
	L-3	Permitted the use of cleaning standards that are functionally equivalent to ISO 14952.	July 29, 2014
	L-4	Updated reference documents, abbreviations, and terms.	August 3, 2015
	L-5	Updated reference documents, abbreviations, and terms.	July 20, 2016
M	Interim	General revision to retitle the standard, incorporate Changes L-1 through L-5, and restructure the requirements by engineering discipline.	March 18, 2019

FOREWORD

KSC-DE-512-SM establishes overall requirements and best design practices to be used at the John F. Kennedy Space Center (KSC) for developing ground systems (GS) in support of operations at launch, landing, and retrieval sites. These requirements apply to the design and development of hardware and software for ground support equipment (GSE) and ground support systems (GSS) used to support the KSC mission for transportation, receiving, handling, assembly, test, checkout, servicing, and launch of space vehicles and payloads and selected flight hardware items for retrieval.

During the 1950s and early 1960s, the Missile Firing Laboratory (later renamed to the Launch Operations Directorate) was the launch operations arm of Redstone Arsenal and the Army Ballistic Missile Agency. The Missile Firing Laboratory used Army specifications and standards for its design and development of ground systems. KSC's effort to develop standards began with GP-863, *General Criteria for Design of New Equipment and Facilities*, which was released in July 1970 and updated three years later. GP-863 focused on operability, reliability, maintainability, useful life, environmental, transportability, human performance, safety, logistics, documentation, and quality assurance. KSC-DE-512-SM, *Facility Systems, Ground Support Systems, and Ground Support Equipment, General Design Requirements*, replaced GP-863 in 1983. The early revisions of KSC-DE-512-SM contained requirements, along with guidance for accomplishing detailed designs. Later revisions became more formal and the "shall" statement became the phrase to identify each requirement. The document title was changed to "development" to emphasize that the standard covers design, fabrication, qualification, and testing.

This standards manual represents a tailored version of [NASA-STD-5005](#) to include KSC-site-specific and local-environment requirements. KSC-DE-512-SM is a single, complete document for the design and development of KSC GS for use at launch, landing, and retrieval sites.

These requirements and practices are optional for equipment used at manufacturing, development, and test sites.

This page was intentionally left blank.

CONTENTS

1.	SCOPE	1
1.1	Purpose	1
1.2	Applicability	1
1.3	Tailoring and Waivers	3
2.	APPLICABLE DOCUMENTS	4
2.1	Government Documents	4
2.2	Non-Government Documents	8
2.3	Order of Precedence	12
3.	DEFINITIONS	12
4.	GENERAL REQUIREMENTS	18
4.1	Use of COTS Equipment in Ground Systems Design	18
4.2	Design for Operational Requirements	19
4.3	Ground System Degradation and Contamination	19
4.4	GS Design for Access	19
4.5	Interfaces	20
4.6	Design Life	20
4.7	Limited-Life Items	21
4.8	Identification, Marking, and Labeling	21
4.8.1	Colors	21
4.8.2	Marking and Labeling	21
4.8.3	Load Capacity Marking	21
4.8.4	Serial Numbers	21
4.9	Interchangeability	21
4.10	Safety	22
4.10.1	Hazard Analysis	22
4.10.2	Safety Requirements on KSC Property	22
4.10.3	Safety Requirements on Air Force Property	22
4.10.4	Safety Requirements on Other NASA Property	22
4.10.5	Caution and Warning Indications	22
4.10.6	Fall Protection	22
4.10.7	Hazmat Suits	22
4.11	Reliability	23
4.11.1	Redundancy	23
4.11.2	Failure Tolerance	23
4.11.3	Failure Propagation	24
4.11.4	System Safety and Reliability Analysis	24
4.11.5	Modeling and Simulation of Critical GSE	24
4.12	Environments	24
4.12.1	Natural Environment	24
4.12.2	Launch-Induced Environment	Error! Bookmark not defined.
4.12.3	Controlled Interior Environment	25
4.12.4	Uncontrolled Interior Environment	25
4.12.5	Fire/Explosion Hazardproofing	25

4.12.6	Environmental Test Methods.....	25
4.12.7	Seismic Environment	25
4.13	Human Factors	26
4.14	Documentation.....	27
4.14.1	Drawings and Specifications	27
4.14.2	Technical Documentation.....	28
4.15	Spares and Limited-Life Items.....	28
4.16	Qualification	28
4.17	Quality Assurance.....	28
4.17.1	General	28
4.17.2	Definition of Quality Requirements	29
4.17.3	Personnel Training.....	29
4.17.4	Testing	29
4.17.5	Metrology and Calibration	29
4.17.6	Quality Conformance Verification.....	29
4.18	Packaging, Handling, Storage, and Transportation	29
4.18.1	Transportation Loads	30
4.18.2	Shipping and Storage Containers.....	30
4.18.3	Parts Protection.....	31
4.18.4	Pyrotechnic Devices.....	31
5.	MATERIALS AND PROCESSES	31
5.1	Flammability Control	32
5.2	Fungus Resistance	33
5.3	Nondestructive Evaluation.....	33
5.4	Metals	34
5.4.1	Carbon and Low-Alloy Steel.....	34
5.4.2	Corrosion-Resistant Steel	34
5.4.3	Aluminum	35
5.4.4	Nickel-Based Alloys	35
5.4.5	Titanium	35
5.4.6	Copper Alloys.....	36
5.4.7	Beryllium and Beryllium Alloys	36
5.4.8	Tin.....	37
5.4.9	Plating.....	37
5.4.10	Corrosion Control.....	37
5.4.11	Stress Corrosion Cracking	37
5.4.12	Hydrogen Embrittlement.....	38
5.5	Nonmetals.....	38
5.5.1	Elastomers.....	38
5.5.2	Composite Materials	38
5.5.3	Refractory Concrete	38
5.5.4	Lubricants	39
5.5.5	Plastic Film, Foam, and Adhesive Tape	39
5.6	Contamination Control.....	40
6.	STRUCTURAL REQUIREMENTS.....	40
6.1	Material Properties.....	40
6.2	Threaded Fasteners.....	40

6.3	Welding.....	41
6.3.1	Weld Classification and Inspection.....	41
6.3.2	Welder/Welding Operator Performance Qualification	41
6.3.3	Welding Procedure Qualification	42
6.4	Structural Brazing.....	42
6.5	Forging.....	43
6.6	Casting.....	43
6.7	Adhesive Bonding	43
6.8	Conventional Structures	44
6.8.1	Steel Conventional Structures	44
6.8.2	Aluminum Conventional Structures	44
6.8.3	Loads for Conventional Structures	44
6.9	Nonconventional Structures (includes structural aspects of mechanisms).....	45
6.9.1	Steel Nonconventional Structures	46
6.9.2	Aluminum Nonconventional Structures.....	46
6.9.3	Composite Nonconventional Structures	46
6.9.4	Fasteners for Nonconventional Structures.....	46
6.9.5	Loads for Nonconventional Structures.....	47
6.9.6	Springs.....	47
6.10	Load Test.....	48
6.11	Fatigue and Design Life	48
7.	MECHANISM REQUIREMENTS.....	49
7.1	Mechanical Margins	49
7.2	Cranes, Hoists, and Other Lifting Devices	49
7.3	Transportation Equipment	49
7.4	Umbilical Design	49
7.5	Bearings.....	49
7.6	Tethering Provisions	49
7.7	Redundancy in Mechanisms	50
8.	FLUID SYSTEM REQUIREMENTS.....	50
8.1	Fluid Compatibility.....	50
8.1.1	Fluids Other than Oxygen	51
8.1.2	Oxygen Systems.....	51
8.2	Fluid System Cleanliness	52
8.3	Fluid System Margins.....	53
8.4	Pressure Vessels and Pressurized Systems (PVS).....	53
8.4.1	Stationary Pressure Vessels	53
8.4.2	Mobile Pressure Vessels.....	53
8.4.3	Internationally Sourced Pressure Vessels	53
8.5	Design of Piping Systems	54
8.5.1	Unlisted Piping Components	54
8.5.2	Identification, Color-Coding, and Labeling	55
8.5.3	Welding.....	55
8.5.4	Flexible (Flex) Hoses	56
8.5.5	Pipe Specifications.....	56
8.5.6	Tubing Specifications	56

8.5.7	Tubing Fabrication and Installation.....	57
8.5.8	Fluid Fittings.....	57
8.5.9	Unlisted Components.....	57
8.5.10	Unlisted Components Other Than COTS.....	58
8.5.11	Pressure Relief Devices.....	58
8.5.12	Qualification of Components by Pressure Test.....	59
8.6	Vacuum and Compressed-Air Systems.....	59
8.7	Breathing Air.....	60
8.8	Pneumatics.....	60
8.9	Hydraulics.....	60
8.9.1	Hydraulic Design.....	60
8.9.2	Hydraulic Components and Assemblies.....	61
8.9.3	Hydraulic Cylinders and Actuators.....	61
8.9.4	Hydraulic Accumulators, Vessels, and Reservoirs.....	61
8.9.5	Hydraulic System Cleaning.....	61
8.9.6	COTS Hydraulic Systems.....	62
8.9.7	Oil Lubrication and Grease Lubrication Systems.....	62
8.10	Hydrocarbon Fuel.....	62
8.11	Environmental Control Systems.....	62
8.12	Cryogenic Systems.....	63
8.13	Hypergolic Fluid Systems.....	63
8.14	Ammonia.....	64
8.15	Refrigeration Systems.....	64
9.	ELECTRICAL AND ELECTRONICS REQUIREMENTS.....	64
9.1	Electrical Design for Pneumatic and Hydraulic Components.....	64
9.2	Electrical Power Systems.....	64
9.2.1	EGSE Power.....	65
9.2.2	Emergency Power.....	65
9.3	Bonding, Grounding, Shielding, and Protection from Electromagnetic Interference, Lightning, and Transient Voltages.....	65
9.4	Hazardproofing.....	65
9.5	Electrical, Electronic, and Electromechanical Parts.....	66
9.6	ESD-Sensitive Components and Assemblies.....	66
9.7	Electrical Power Receptacles and Plugs.....	66
9.8	Cable, Wiring, and Harnesses.....	66
9.9	Soldering.....	67
9.10	Fiber Optics.....	68
9.11	Connectors.....	68
9.12	Sensors and Transducers.....	69
9.13	Racks, Panels, and Modular Enclosures.....	69
9.14	Electromagnetic Relays.....	69
9.15	Switches.....	70
9.15.1	Low Current Switches.....	70
9.15.2	High Current Switches.....	70
9.15.3	Heavy-Duty Pushbutton or Key Switches.....	70
9.15.4	Rotary Switches.....	70
9.15.5	Corrosive or Outdoor Environments.....	70
9.16	Fuses.....	70

9.17	Circuit Breakers.....	71
9.18	Bus Bars	71
9.19	Printed Circuit Boards	71
9.19.1	Printed Circuit Board Design	71
9.19.2	Printed Circuit Board Fabrication and Acceptance	71
9.19.3	Printed Circuit Assembly Fabrication and Acceptance	72
9.19.4	Conformal Coating	72
9.20	Electric Motors and Generators.....	72
9.21	Motor Starters and Controllers	72
9.22	Electrical Fabrication, Assembly and Installation.....	72
10.	CONTROL AND SOFTWARE REQUIREMENTS.....	73
10.1	Programmable Logic Controllers	73
10.2	Software.....	73
10.3	Security of Information Technology	73
APPENDIX A.	REFERENCE DOCUMENTS	74
APPENDIX B.	GROUND SYSTEM IDENTIFICATION SYSTEM COLORS	79
APPENDIX C.	GS DOCUMENTATION DELIVERABLES	81
APPENDIX D.	PRESSURE VESSELS AND SYSTEMS	83

FIGURES

Figure 1. KSC-DE-512-SM Applicability	2
---	---

TABLES

Table 1. Transportation Loads	300
Table 2. Summary Table of Factors of Safety	446

This page was intentionally left blank.

ABBREVIATIONS, ACRONYMS, AND SYMBOLS

Most units of measure and some terms commonly understood within the subject disciplines have been abbreviated in the body of this standards manual without callout but are included among the following.

°C	degree Celsius
°F	degree Fahrenheit
"	inch
A	ampere
A-50	aerozine 50
A&E	architect and engineering
AC	alternating current
ASD	acceleration spectral density
ASME	American Society of Mechanical Engineers
Btu	British thermal unit
CG	center of gravity
CGA	Compressed Gas Association
CIL	Critical Items List
COPV	composite overwrapped pressure vessel
COTS	commercial off-the-shelf
CPE	chlorinated polyethylene
CTFE	chlorotrifluoroethylene
dB	Decibel
DC	direct current
DCR	Design Certification Review
DOT	Department of Transportation
ECS	Environmental Control System
EEE	electrical, electronic, and electromechanical
e.g.	for example
EGSE	electrical GSE
EMC	electromagnetic compatibility
EMI	electromagnetic interference
ESD	electrostatic discharge
etc.	and so forth
ETFE	ethylene tetrafluoroethylene
FMEA	Failure Mode and Effects Analysis
ft	foot
g	gravity
GO ₂	gaseous oxygen
GS	ground systems
GSE	ground support equipment
GSS	ground support systems
HVAC	heating, ventilation, and air conditioning
Hz	hertz

i.e.	that is
kg	kilogram
kPa	kilopascal
KSC	John F. Kennedy Space Center
ksi	one thousand pounds per square inch
lb	pound
LO ₂	liquid oxygen
M&P	materials and processes
MAPTIS	Materials and Processes Technical Information System
MAWP	maximum allowable working pressure
MEOP	maximum expected operating pressure
MHz	megahertz
MMH	monomethylhydrazine
MOTS	modified off-the-shelf
MPa	megapascal
N ₄ H ₄	hydrazine
N ₂ O ₄	nitrogen tetroxide
NAS	National Aerospace Standards
NASA	National Aeronautics and Space Administration
NDE	nondestructive evaluation
NE	KSC Engineering Directorate
NEMA	National Electrical Manufacturers Association
NFPA	National Fire Protection Association
NO ₂	nitrogen dioxide
NPT	national pipe thread
O ₂	oxygen
OPRD	Office of Primary Responsibility-Designee
Pb	lead
PCTFE	polychlorotrifluoroethylene
PFA	plastic film, foam, and adhesive tape
pH	potential of hydrogen
PHE	propellant handler's ensemble
PLC	programmable logic controller
PPE	personal protective equipment
PQR	procedure qualification record
PSD	Power Spectral Density
psi	pound per square inch
psia	pound per square inch absolute
PTFE	polytetrafluoroethylene
PVS	pressure vessels and pressurized systems
RF	radio frequency
rms	root mean square
RoHS	Restriction of Hazardous Substance
S&MA	KSC Safety and Mission Assurance Directorate
SCAPE	self-contained atmospheric protective ensemble

SCC	stress corrosion cracking
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association
Sn	tin
STE	special test equipment
UDMH	unsymmetrical dimethylhydrazine
UL	Underwriters Laboratory
UNS	Unified Numbering System
UTS	ultimate tensile strength
V	volt
vs.	versus
WPQ	welder performance qualification
WPS	welding procedure specification

This page was intentionally left blank.

1. SCOPE

1.1 Purpose

KSC-DE-512-SM establishes requirements and guidance for the design and fabrication of ground systems (GS), which includes ground support equipment (GSE) and ground support systems (GSS), to provide uniform methods and processes for the design and development of robust, safe, reliable, maintainable, supportable, and cost-effective GS in support of space flight and institutional programs and projects. This standards manual is intended to supplement the minimum requirements of [NASA-STD-5005](#) by applying more site-specific, stringent, restrictive, or demanding requirements applicable to the specific Kennedy Space Center (KSC) environment and to ensure compatibility with existing systems. This standards manual also provides requirements for GSS because these systems are not covered by [NASA-STD-5005](#).

1.2 Applicability

This document applies to all ground systems designed for use at KSC and design projects managed by KSC for other launch, landing, and recovery locations. This document may be invoked by a program or project for testing facilities, laboratories, flight hardware manufacturing facilities, or other applications. The applicability of KSC-DE-512-SM relative to other NASA and industry design standards is shown in Figure 1.

- a. This standards manual applies to all new and modified GS for programs and projects assigned to KSC. The Program may specify the use of this standards manual to other applications (e.g. test hardware or facility projects).
- b. KSC-DE-512-SM establishes minimum design requirements for GS, as defined herein, for NASA programs and projects assigned to KSC. This standards manual is intended to establish uniform engineering best practices and methods in the design, documentation, procurement, fabrication, assembly, test, and installation of GS to support KSC operations.
- c. This standards manual is required for use by KSC design entities and their support contractors and may be cited in contracts, projects, and other documents as necessary to provide a technical requirement.
- d. Rationale and guidance are provided in italic text after the requirement where more definition is needed.
- e. The requirements of this standards manual are optional for hardware used only at manufacturing, development, or test sites but are mandatory for hardware used at launch, landing, and retrieval sites.

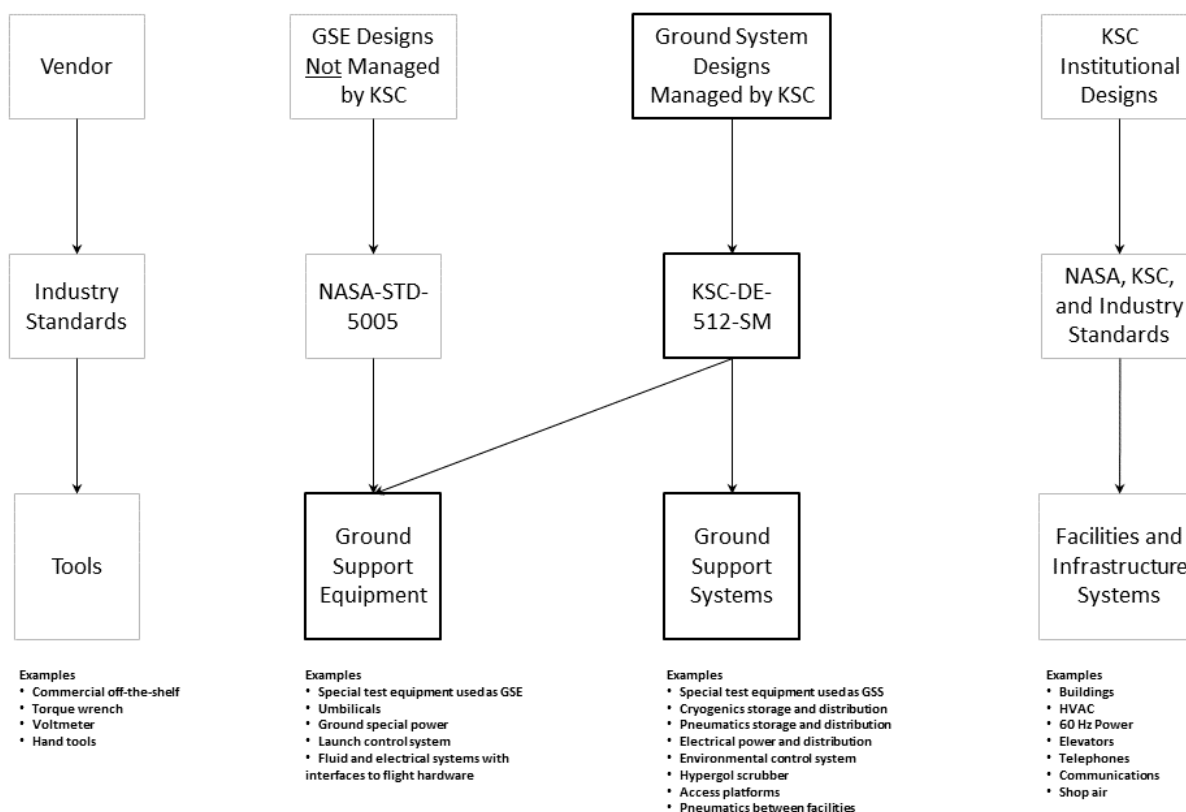


Figure 1. KSC-DE-512-SM Applicability

- f. A program may invoke additional requirements that differ from the requirements stated herein. These requirements will be evaluated and approved for use by the KSC Engineering Technical Authority. See [KSC-PLN-5400](#) and 1.3.
- g. The Program may elect to manufacture GS or components of GS to NASA flight hardware requirements if the design meets Programmatic functional requirements. The requirements of this document are satisfied by the requirements of NASA flight hardware design and manufacturing standards. NASA and KSC safety requirements for ground systems are not intrinsically satisfied by NASA flight hardware standards and must be addressed in full.
- h. KSC Directorates are responsible for invoking this standards manual for the design and development of GS. KSC Directorates have responsibilities described as follows:
 - (1) KSC Engineering and KSC Safety and Mission Assurance (S&MA) have the responsibility to determine categories or types of GS (e.g., critical vs. noncritical) and any additional requirements resulting from these categories or types.
 - (2) The KSC [Authority Having Jurisdiction](#) has the responsibility and authority to define hazardous areas and approve designs that provide equipment to these areas.
- i. This standards manual applies to the following (see Section 4):
 - (1) ground support equipment,

- (2) ground support systems,
 - (3) facility ground support systems,
 - (4) special test equipment, and
 - (5) modifications to commercial off-the-shelf (i.e., modified off-the-shelf [MOTS]).
- j. [NASA-STD-5005](#) may be applied by the governing program for GSE provided by entities other than KSC.
- k. This standards manual does not apply to the following:
- (1) flight hardware,
 - (2) tools (standard shop),
 - (3) facilities and utilities (in-house and architect and engineering [A&E] firms), or
 - (4) design and fabrication of commercial off-the-shelf (COTS) equipment (the application and usage of COTS equipment in GSE designs must meet the requirements of this standard).

KSC-DE-512-SM does not cover the design and fabrication of tools, facilities and utilities, or COTS equipment. However, other KSC standards and industry standards may apply to these designs.

- 1. The Technical Authority determines the classification of equipment listed in 1.2.i, 1.2.j, and 1.2.k.

1.3 Tailoring and Waivers

Individual provisions of this standards manual should be and are intended to be tailored (i.e., modified or deleted) to meet specific program and project needs. All tailoring is required to be evaluated for use by the KSC Engineering Technical Authority (see [KSC-PLN-5400](#)). Waivers to institutional requirements will follow the process in [KDP-KSC-P-1865](#).

1.4 Use of Shall, May, Should, and Will

In this standards manual, the auxiliary verb “shall” denotes mandatory actions (i.e., requirements) that are verified. “May” denotes discretionary privilege or permission. “Should” denotes a good practice that is recommended but is not required. The term “will” denotes an expected outcome, a requirement levied by others, or a requirement that does not have mandated verification. When this standards manual is placed on a contract, the “will” statements in this standards manual are equivalent to “shall” statements for the purposes of the contract.

Requirements denoted by “shall” require formal evidence for closure. “Will” is a formal requirement which is verified during design reviews and certification meetings, but does not require formal documented evidence tied to that requirement.

2. APPLICABLE DOCUMENTS

The following documents form a part of this document to the extent specified herein. When this document is used for procurement, including solicitations, or is added to an existing contract, the specific revision levels, amendments, and approval dates of said documents should be specified in an attachment to the Solicitation/Statement of Work/Contract.

The applicable documents are accessible via the NASA Standards and Technical Assistance Resource Tool at <http://standards.nasa.gov> or may be obtained directly from the standards developing organizations or other document distributors.

Citations of applicable documents are hyperlinked to their appearance in 2.1 and 2.2. Citations of reference documents, which are listed in Appendix A, are not hyperlinked.

2.1 Government Documents

120E3100003	Electrical Cable Fabrication Requirements
29 CFR 1910	Occupational Safety and Health Standards
29 CFR 1910.120, Appendix B	Occupational Safety and Health Standards, Subpart H: Hazardous Materials, Hazardous waste operations and emergency response, Appendix B: General description and discussion of the levels of protection and protective gear
29 CFR 1926	Safety and Health Regulations for Construction
49 CFR 171 through 180	Hazardous Materials Regulations (Department of Transportation)
79K07491	Installation of Purge Hardware
AFSPCMAN 91-710	Range Safety User Requirements Manual, Volume 3, Launch Vehicles, Payloads, and Ground Support Systems Requirements
HF-STD-001	Human Factors Design Standard (HFDS) For Acquisition of Commercial Off-the-Shelf Subsystems, Non- Developmental Items, and Developmental Systems
KDP-KSC-P-1865	Institutional Requirement Deviation/Waiver Process
KNPR 8700.2	KSC System Safety and Reliability Analysis Methodology Procedural Requirements
KNPR 8715.3-1	KSC Safety Practices Procedural Requirements, Volume 1, Safety Procedural Requirements for Civil Servants/NASA Contractors
KNPR 8730.1	KSC Metrology and Calibration Procedural Requirements

KNPR 8730.2	KSC Quality Assurance Procedural Requirements
KSC-DF-107	Technical Documentation Style Guide
KSC-E-165	Electrical Ground Support Equipment Fabrication, Specification For
KSC-E-166	Installation and Assembly, Electrical Ground Support Equipment (GSE), Specification for
KSC-GP-425	Fluid Fitting Engineering Standards
KSC-GP-435	Engineering Drawing Practices, Vol. I of II: Aerospace and Ground Support Equipment
KSC-GP-864	Electrical Ground Support Equipment Cable Handbook
KSC-GP-986	Design Criteria for Reusable Space Vehicle Umbilical Systems
KSC-NE-9187	Sensors, Transducers and Signal Conditioning Systems Selection Guidelines
KSC-PLN-5400	Technical Authority Implementation Plan
KSC-PLN-5406	Design and Development Electrical, Electronic, Electromechanical (EEE) Parts Plan
KSC-SPEC-P-0027	Tubing, Superaustenitic Steel, Corrosion Resistant, UNS N08367 and UNS S31245, Seamed, Bright Annealed, Passivated, Specification for
KSC-SPEC-Z-0008	Fabrication and Installation of Flared Tube Assemblies and Installation of Fittings and Fitting Assemblies, Specification for
KSC-SPEC-Z-0009	Lubrication, Thread, Corrosion-Resistant Steel and Aluminum Alloy Tube Fittings, Specification for
KSC-STD-132	Potting and Molding Electrical Cable Assembly Terminations, Standard for
KSC-STD-141	Load Test Identification and Data Marking, Standard for
KSC-STD-164	Environmental Test Methods for Ground Support Equipment, Standard for
KSC-STD-E-0002	Hazardproofing of Electrically Energized Equipment, Standard for
KSC-STD-E-0004	Pneumatic and Hydraulic Mechanical Components, Electrical Design, Standard for
KSC-STD-E-0011	Electrical Power Receptacles and Plugs, Standard for
KSC-STD-E-0015	Standard for Marking of Ground Support Equipment

KSC-STD-E-0022	Bonding, Grounding, Shielding, Electromagnetic Interference, Lightning and Transient Protection, Design Requirements for Ground Systems
KSC-STD-P-0006	Quick Release Pins and Pin Tethers, Standard for
KSC-STD-S-0033	Kennedy Space Center Fall Protection Standard
KSC-STD-Z-0005	Pneumatic Ground-Support Equipment, Design of, Standard for
KSC-STD-Z-0006	Design of Hypergolic Propellants Ground Support Equipment, Standard for
KSC-STD-Z-0008	Design of Ground Life Support Systems and Equipment, Standard for
KSC-STD-Z-0009	Cryogenic Ground Support Equipment, Design of, Standard for
MIL-DTL-16878	Wire, Electrical, Insulated, General Specification for
MIL-DTL-22992	Connectors, Plugs and Receptacles, Electrical, Waterproof, Quick Disconnect, Heavy Duty Type, General Specification for
MIL-DTL-24308	Connectors, Electric, Rectangular, Nonenvironmental, Miniature, Polarized Shell, Rack and Panel, General Specification for
MIL-DTL-38999	Connectors, Electrical, Circular, Miniature, High Density, Quick Disconnect (Bayonet, Threaded or Breech Coupling), Environment Resistant with Crimp Removable Contacts or Hermetically Sealed with Fixed, Solderable Contacts, General Specification for
MIL-HDBK-263	Electrostatic Discharge Control Handbook for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices) (Metric)
MIL-HDBK-6870	Nondestructive Inspection Program Requirements for Aircraft and Missile Materials and Parts
MIL-PRF-39012	Connectors, Coaxial, Radio Frequency, General Specification for
MIL-STD-101	Color Code for Pipelines and for Compressed Gas Cylinders
MIL-STD-202	Test Method Standard, Electronic and Electrical Component Parts

MIL-STD-810	Environmental Engineering Considerations and Laboratory Tests
MIL-STD-889	Dissimilar Metals
MIL-STD-1686	Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices)
MSFC-STD-3029	Guidelines for the Selection of Metallic Materials for Stress Corrosion Cracking Resistance in Sodium Chloride Environments
NASA/TM-2008-215633	Terrestrial Environment (Climatic) Criteria Guidelines for Use in Aerospace Vehicle Development
NASA-STD-4003	Electrical Bonding for NASA Launch Vehicles, Spacecraft, Payloads, and Flight Equipment
NASA-STD-5005	Standard for the Design and Fabrication of Ground Support Equipment
NASA-STD-5008	Protective Coating of Carbon Steel, Stainless Steel, and Aluminum on Launch Structures, Facilities, and Ground Support Equipment
NASA-STD-5009	Nondestructive Evaluation Requirements for Fracture-Critical Metallic Components
NASA-STD-6001	Flammability, Offgassing, and Compatibility Requirements and Test Procedures
NASA-STD-7009	Standard for Models and Simulation
NASA-STD-8719.9	Lifting Standard
NASA-STD-8719.12	Safety Standard for Explosives, Propellants, and Pyrotechnics
NASA-STD-8719.17	NASA Requirements for Ground-Based Pressure Vessels and Pressurized Systems (PVS)
NASA-STD-8739.1	Workmanship Standard for Polymeric Application on Electronic Assemblies
NASA-STD-8739.4	Crimping, Interconnecting Cables, Harnesses, and Wiring
NASA-STD-8739.5	Workmanship Standard for Fiber Optic Terminations, Cable Assemblies, and Installation
NPR 2810.1	Security of Information Technology
NPR 6000.1	Requirements for Packaging, Handling, and Transportation for Aeronautical and Space Systems, Equipment, and Associated Components

NPR 7150.2	NASA Software Engineering Requirements
NPR 8705.2	Human-Rating Requirements for Space Systems
NPR 8715.3	NASA General Safety Program Requirements

2.2 Non-Government Documents

ASHRAE 81170	American Society of Heating, Refrigeration, and Air-Conditioning Engineers (ASHRAE), ASHRAE Handbook—Fundamentals
ADM	Aluminum Association Aluminum Design Manual
AISC 325	Steel Construction Manual
API 620	Design and Construction of Large, Welded, Low-Pressure Storage Tanks
ASCE-7	Minimum Design Loads for Buildings and Other Structures
ASME B16 series	Standards for Pipes and Fittings
ASME B31.1	Power Piping
ASME B31.3	Process Piping
ASME B31.5	Refrigeration Piping and Heat Transfer Components
ASME B31.8	Gas Transmission and Distribution Piping Systems
ASME BPVC-II	ASME Boiler & Pressure Vessel Code, Section II, Materials
ASME BPVC-VIII	ASME Boiler & Pressure Vessel Code, Section VIII, Division 1: Rules for Construction of Pressure Vessels, Division 2: Alternative Rules, Division 3: Alternative Rules
ASME BPVC-X	ASME Boiler & Pressure Vessel Code, Section X, Fiber-Reinforced Plastic Pressure Vessels
ASME Y14.100	Engineering Drawing Practices
ASSP Z359.1	Fall Protection Code
ASTM A249	Standard Specification for Welded Austenitic Steel Boiler, Superheater, Heat-Exchanger, and Condenser Tubes
ASTM A269	Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service
ASTM A312	Standard Specification for Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes

ASTM A380	Standard Practice for Cleaning, Descaling, and Passivation of Stainless Steel Parts, Equipment, and Systems
ASTM A967	Standard Specification for Chemical Passivation Treatments for Stainless Steel Parts
ASTM B152	Standard Specification for Copper Sheet, Strip, Plate, and Rolled Bar
ASTM D4174	Standard Practice for Cleaning, Flushing, and Purification of Petroleum Fluid Hydraulic Systems
ASTM D4470	Standard Test Method for Static Electrification
ASTM D7194	Standard Specification for Aerospace Parts Machined from Polychlorotrifluoroethylene (PCTFE)
ASTM E1417	Standard Practice for Liquid Penetrant Testing
ASTM E1444	Standard Practice for Magnetic Particle Testing
ASTM E1548	Standard Practice for Preparation of Aerospace Contamination Control Plans
ASTM E1742	Standard Practice for Radiographic Examination
ASTM E2375	Standard Practice for Ultrasonic Testing of Wrought Products
ASTM F3125	Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions
ASTM G93	Standard Practice for Cleaning Methods and Cleanliness Levels for Material and Equipment Used in Oxygen-Enriched Environments
ASTM MNL 36	Safe Use of Oxygen and Oxygen Systems: Handbook for Design, Operation, and Maintenance
AWS C3.3	Recommended Practices for the Design, Manufacture, and Examination of Critical Brazed Components
AWS D17.1	Specification for Fusion Welding for Aerospace Applications
CGA C-7	Guide to Classification and Labeling of Compressed Gases
EU 97/23/EC	Directive of the European Parliament and of the Council on the Approximation of the Laws of the Member States Concerning Pressure Equipment

ESD S20.20	For the Development of an Electrostatic Discharge Control Program for – Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices)
IEC 60807-1	Rectangular connectors for frequencies below 3 MHz
IEC 61131-2	Programmable controllers – Part 2: Equipment requirements and tests
IEC 61131-3	Programmable controllers – Part 3: Programming languages
IPC J-STD-001	Requirements for Soldered Electrical and Electronic Assemblies, Performance Class 3
IPC J-STD-001(S)	Joint Industry Standard, Space Applications Electronic Hardware Addendum to IPC J-STD-001, Requirements for Soldered Electrical and Electronic Assemblies
IPC 2221	Generic Standard on Printed Board Design
IPC 2222	Sectional Design Standard for Rigid Organic Printed Boards
IPC 2223	Sectional Design Standard for Flexible Printed Boards
IPC 2252	Design Guide for RF/Microwave Circuit Boards
IPC 6011	Generic Performance Specification for Printed Boards
IPC 6012	Qualification and Performance Specification for Rigid Printed Boards
IPC 6013	Qualification and Performance Specification for Flexible Printed Boards
IPC 6018	Qualification and Performance Specification for High Frequency (Microwave) Printed Boards
IPC/WHMA-A-620	Requirements and Acceptance for Cable and Harness Assemblies
IPC/WHMA-A-620-S	Space Applications Electronic Hardware Addendum
ISO 4126	Safety devices for protection against excessive pressure
ISO 17491	Protective clothing – Test methods for clothing providing protection against chemicals Part 1: Determination of resistance to outward leakage of gases (internal pressure test) Part 2: Determination of resistance to inward leakage of aerosols and gases (inward leakage test)

	Part 3: Determination of resistance to penetration by a jet of liquid (jet test)
ISO/TR 10771-2	Hydraulic fluid power – Fatigue pressure testing of metal pressure-containing envelopes – Part 2: Rating methods
NEMA HP 7	Electrical and Electronic PVC, PVC/Nylon, and PE/Nylon 105°C Hook-Up Wire, Types B, C, D, BN, CN, and DN (600, 1000, and 3000 V), and Types J and JN 75°C (600V)
NFPA 59A	Standard for the Production, Storage, and Handling of Liquefied Natural Gas (LNG)
NFPA 70	National Electrical Code
NFPA 70E	Standard for Electrical Safety in the Workplace
NFPA 496	Standard for Purged and Pressurized Enclosures for Electrical Equipment
NFPA 1991	Standard on Vapor-Protective Ensembles for Hazardous Materials Emergencies and CBRN Terrorism Incidents
NFPA T2.6.1	Fluid power components – Method for verifying the fatigue and establishing the burst pressure ratings of the pressure containing envelope of a metal fluid power component
SAE AMS 2759	Heat Treatment of Steel Parts, General Requirements
SAE AMS 2759/9	Hydrogen Embrittlement Relief (Baking) of Steel Parts
SAE AMS 2774	Heat Treatment Wrought Nickel Alloy and Cobalt Alloy Parts
SAE AMS-DTL-23053/5	Insulation Sleeving, Electrical, Heat Shrinkable, Polyolefin, Flexible, Crosslinked
SAE AMS-H-6875	Heat Treatment of Steel Raw Materials
SAE AMS-STD-2154	Inspection, Ultrasonic, Wrought Metals, Process for
SAE ARP 1658	Hose Assemblies, Installed, Visual Inspection Guide For
SAE ARP 4402	Eddy Current Inspection of Open Fastener Holes in Aluminum Aircraft Structure
SAE AS 22759	Wire, Electrical, Fluoropolymer-Insulated, Copper or Copper Alloy
SAE AS 4787	Eddy Current Inspection of Circular Holes in Nonferrous Metallic Aircraft Engine Hardware
SAE AS 50151	Connectors, Electrical, Circular Threaded, AN Type, General Specification for

SAE AS 50861	Wire, Electric, Polyvinyl Chloride Insulated, Copper or Copper Alloy
SAE AS 5942	Marking of Electrical Insulating Materials
SAE CHS-17-1G	Composite Materials Handbook, Volume 1: Polymer Matrix Composites Guidelines for Characterization of Structural Materials
SAE CHS-17-2G	Composite Materials Handbook, Volume 2: Polymer Matrix Composites Materials Properties
SAE CHS-17-3G	Composite Materials Handbook, Volume 3: Polymer Matrix Composites Materials Usage, Design, and Analysis
SAE J518	Hydraulic Flanged Tube, Pipe, and Hose Connections, 4-Screw Flange Connection
SMACNA 1958	HVAC Systems Duct Design
UL 207	UL Standard for Safety Refrigerant-Containing Components and Accessories, Nonelectrical

2.3 Order of Precedence

This standards manual does not supersede or waive established Agency requirements found in other documentation. Conflicts between this standards manual and applicable documents cited herein will be resolved by the responsible Technical Authorities.

1. Federal, state, and local laws and regulations
2. Agency and Center Directives
3. Agency mandatory standards

3. DEFINITIONS

For the purpose of this document, the following definitions apply.

analysis: use of calculations, numerical simulations, tools, techniques, and physics/engineering-based modeling to determine that the requirement is satisfied.

Rationale: Engineering analysis proceeds by (1) separating the engineering design into the components and disciplines, (2) analyzing or estimating each component of the operation or failure mechanism separately, and (3) recombining the components in accordance with physics and engineering principles. The methods selected must be supported by appropriate technical rationale and be documented in detail.

brittle metal: metallic material with an elongation at the maximum load in a standard tensile test of less than 5.0% at both the design temperature and the testing temperature.

Note that this is NOT the elongation at failure/elongation at fracture in the standard tensile test. That is the value that is typically reported and tabulated. The elongation at maximum load/maximum engineering stress is the basis of the criteria (ASTM refers to this as the Uniform Elongation).

catastrophic: failure that results in serious injury, damage to flight hardware, loss of mission, or major damage to a significant ground asset.

certified: having successfully completed a program-approved Design Certification Review (DCR) process with documented evidence to satisfy a set of specific design requirements and functional/performance requirements approved by the cognizant Technical Authority.

Rationale: Certification remains valid only if the supporting documentation demonstrates that the design meets all the original design requirements (KSC-DE-512-SM, NASA-STD-5005, etc.) and performance requirements (weight, load capacity, flow rate, interface, etc.) of its original certification. Any waivers will be reevaluated against current requirements by the current Technical Authority.

commercial off-the-shelf (COTS): equipment, including hardware and associated software, that is commercially available from a vendor and built to industry specifications. This includes items purchased as a standard off-the-shelf part with options available to any purchaser. Items purchased against a Government design specification or drawing, or custom-made by a vendor for NASA, are not COTS. The selection of COTS for use in GS is required to meet the design requirements of this standards manual and the performance and safety requirements of the system.

Rationale: COTS is designed and fabricated by commercial entities and, as such, is not covered by this standards manual. Design activities, such as writing a specification or statement of work or creating drawings, do not fall under the definition of COTS because the procuring agency—not the commercial entity—is then taking responsibility. Commercial items or components should be used when they satisfy the GS function and will not degrade the safety or reliability of the ground or flight system. Requirements should be specified in terms of functionality or performance rather than design. To qualify as COTS, equipment must not be modified (see MOTS).

conventional structures: structures composed predominately of standard structural shapes and connections typical of commercial or residential construction, such as office buildings, warehouses, machine shops, and other facilities whose structures are characterized by well-established design precedents and loading conditions. Conventional structures typically comprise facility structures, permanent launch pad structures, mobile launcher towers, mobile launcher base/platforms, and GSS structures.

corrosive environment: a marine (sea coast) or launch-induced environment that causes accelerated degradation of materials as a result of oxidation or chemical reaction.

Rationale: In the corrosive marine (sea coast) environment at KSC, the most common sources of corrosion are moisture and sodium chloride. The launch-induced

environment also introduces hydrochloric acid, which exacerbates the corrosive effects of the marine environment.

critical: loss of function or improper performance could result in serious injury, damage to flight hardware, loss of mission, or major damage to a significant ground asset.

Rationale: GSE systems are typically considered to be critical.

criticality: a program-defined measure of the consequences of a failure mode.

Rationale: Criticality of a GS is determined by an S&MA or NE analysis of the equipment's function and application. The classifications assigned to the GS will guide the design team in determining which specifications and standards to apply, which materials to select, and how to document the GS.

demonstration: a verification method that determines the properties on an end item by observation of its operation. This method is generally employed where qualitative operational performance is to be verified. A demonstration must be witnessed and documented.

design life: the operational life of equipment (to include storage life, installed life in a nonoperating mode, and operational service life), after which the equipment will be replaced or recertified. It is the responsibility of the program/project to determine recertification requirements, which may include refurbishment, analysis, or test.

ductile metal: metallic material with an elongation at the maximum load in a standard tensile test of greater than 5.0% at both the design temperature and the testing temperature.

facility: land, buildings, structures, and other real property improvements, including facility systems (utility systems and collateral equipment). Facility systems include heating, ventilation, and air conditioning (HVAC); 60 hertz (Hz) power; potable water; elevators; lighting; shop air; etc. Facility systems may support or have interfaces with GS. The term *facility* does not include GSE, GSS, facility ground support systems, tools, or special test equipment.

factor of safety: a constant that has been defined for yield and ultimate design criteria and that is the ratio of the yield or ultimate design loads to the limit load (the maximum allowable design load). If the factor of safety is defined in terms of stress, it is the ratio of the ultimate or yield stress to the maximum design stress. In fatigue design, it is the ratio of the calculated fatigue life to the allowable design life. This standards manual specifies the minimum factor of safety for GS for specific structural applications (e.g., pressure vessels, threaded fasteners, and aluminum structures).

Rationale: This definition is consistent between ground hardware and flight hardware. This definition is inherently load-based. It reduces to the traditional stress-based definition in the simplest case.

flight hardware: hardware intended for launch into space, including boosters, engines, payloads, and manned or unmanned components.

fracture-critical: classification of hardware where a crack could lead to a failure that results in serious injury, damage to flight hardware, loss of mission, or major damage to a significant ground asset.

ground support equipment (GSE): nonflight equipment, systems, or devices specifically designed and developed for a direct physical or functional interface with flight hardware.

Rationale: Equipment used during the manufacturing of flight hardware is not considered to be GSE. Each program defines when manufacturing ends and processing of the flight hardware begins. If manufacturing equipment is to be used after flight hardware processing begins, it must be designed to meet GSE requirements. GSE does not include tools that are designed for general use and not specifically for use on flight hardware.

ground support system (GSS): equipment or infrastructure (portable or fixed) that provides functional or physical support to GSE. It does not directly interface with flight hardware, although it may supply commodities, power, or data that eventually reaches the flight hardware after being conditioned or controlled by GSE.

Rationale: Design standards for GSS may be similar to or, at the discretion of the program/project, identical to the design standards for GSE. Protective features designed into the GSE prevent failures from propagating to flight hardware.

ground systems (GS): ground support equipment, ground support systems, and facility ground support systems.

inspection: measurement or examination of one or more characteristics of a product or service and comparison with specified requirements to determine conformity.

limited-life item: equipment or component that degrades as a result of operating time, cycling, or material aging and that has a shorter lifetime than the system's design life. Limited-life items require periodic replacement or refurbishment, which must be defined in design and maintenance documents. This does not include items that require periodic calibration or are replaced as part of normal maintenance and wear-and-tear.

modified off-the-shelf (MOTS): commercially available equipment, including hardware and associated software and procedures, modified for a specific application in GS.

Rationale: Modification of COTS voids the design intent of the original equipment and places responsibility for performance, functionality, and reliability on the designer.

M&P, M&P Technical Authority: NASA or NASA-approved cognizant engineer/scientist with authority to approve deviations from materials and processes requirements in this standards manual. In general, the phrase, M&P Approval, refers to the cognizant materials and processes engineer who approves design drawings and documents. The M&P Technical Authority is the

single materials and processes engineer with delegated technical authority from the KSC Chief Engineer.

Rationale: This standards manual includes many specific requirements that may be modified or interpreted by the NASA M&P engineer or the NASA M&P Technical Authority (M&P Chief Engineer).

nonconventional structures: structures that are not within the scope of national consensus standards for structural design such as standards issued by AISC, the Aluminum Association, or ASME. Nonconventional structures are experimental in nature, and employ members and connections that are predominantly atypical to commercial structures. Structures are nonconventional if the primary loading is outside the scope of commercial standards or is difficult to accurately define, such as launch acoustics, pyrotechnic, launch vibration, rocket exhaust, T-0 release. Nonconventional structures lack established design precedent in commercial codes and are subject to frequent modifications to support changes in the operational requirements. Nonconventional structures typically comprise hold down posts/vehicle support posts, umbilical connections to flight hardware, umbilical mechanisms, GSE structures, and GSE mechanisms. Umbilical swing arm structures, tilt-up arm structures, tail service mast arm structures, etc. may be conventional or nonconventional depending on design member and joint details and the dominant loading.

Rationale: The transition region between conventional and nonconventional structures should be designed to meet the criteria for both types of structure.

oxygen-enriched: containing more than 25 molar percent oxygen.

Rationale: Other standards such as those published by the National Fire Protection Association or the Occupational Safety and Health Administration differ from the definition in their specification of oxygen concentration (22%). Dry air is approximately 21% oxygen.

safe working load: the maximum assigned load the device or equipment can operationally handle and maintain. This value is marked on the device, indicating maximum working capacity. This is also the load referred to as “rated load” or “working load limit.” If the device has never been downrated, this also is the “manufacturer’s rated load.”

special test equipment (STE): equipment designed for limited or one-time use in a variety of applications. STE is classified as GSE or GSS and is designed to the requirements of this standards manual.

Rationale: Although its use is limited, STE has the potential to cause damage to flight hardware or injury to personnel. STE includes equipment traditionally known as shop aids.

Technical Authority: a NASA employee, at a delegated level of authority, who provides independent oversight of programs and projects in support of safety and mission success. Technical Authority delegations are formal and traceable to the NASA Administrator. Technical Authorities are funded independently of a program or project.

testing: an activity that determines an item's ability to meet specified requirements by subjecting the item to a set of physical, chemical, environmental, or operating actions or conditions. It includes measurements taken with certified and calibrated tools in accordance with generally accepted scientific or engineering principles.

tools: standard off-the-shelf items, not specifically designed by or for NASA, used to service ground or flight systems that are not integral to the system being serviced. Items custom-made or modified to meet NASA specifications are not tools, are considered GSE or GSS, and are subject to the design requirements of this standards manual.

Rationale: Tools are not designed to specifically interface with flight hardware, nor are they designed to perform a function specific to flight hardware. Their design and general use in industry include a variety of applications that may be required on flight hardware or GSE. Tools are intended for use by trained technicians and facilitate manual operations, such as torquing fasteners, cutting wire, checking electrical continuity, or verifying surface clearances. Examples of tools include torque wrenches, ratchets, sockets, voltmeters, go/no-go gages, screwdrivers, wire cutters, and pliers.

traceability: the data, reports, and records that document the history of a product or component from the point of origin to final use.

Rationale: Documentation may include the origin of materials and parts and certification of personnel and processes during fabrication, assembly, procurement, installation, activation, verification, and validation.

validation: a two-part process to confirm first that the design requirements comply with the stakeholders' expectations and second that the final product complies with operational requirements.

Rationale: Validation answers the question, "Does it do what the stakeholders/users/customers want it to do?"

verification: proof of compliance with design solution specifications and descriptive documents. Verification may be determined by a combination of test, analysis, demonstration, and inspection.

4. GENERAL REQUIREMENTS

In order to meet customer requirements, individual system and equipment design projects may need to meet criteria that are more stringent than those specified herein. In such cases, these criteria should be determined by the responsible design organization in consultation with the customer and other stakeholders (e.g., users and operators).

4.1 Use of Alternative Equipment in Ground Systems

4.1.1 Use of COTS Equipment in Ground Systems Design

Each program/project has the responsibility to define its own policy for the acceptance of COTS equipment in GS.

When a program/project approves the use of COTS equipment in GS, the following design requirements apply:

- a. COTS equipment shall be evaluated for acceptability from a materials and processes (M&P) standpoint and in its intended environmental conditions (temperature, humidity, vibration, acoustic, EMC, etc.).
- b. Qualification tests and inspections shall be indicated in the engineering documentation.
- c. Vendor documentation shall be provided as evidence that the requirements of this standards manual have been met.
- d. Modifications to COTS shall be performed in accordance with this standards manual.
- e. COTS incorporated into GSE shall be selected for use within the limits of the manufacturer's specified ratings (e.g., environmental, mechanical, electrical, electromagnetic compatibility, etc.).

COTS equipment should be used to the maximum extent possible when (1) it satisfies the intended function, (2) it will not degrade the safety or reliability of the flight or ground system, and (3) it provides a cost savings that exceeds possible cost increases that may result from unique maintenance or logistics requirements, modifications, or an increase in the complexity of the interfacing equipment. Vendor or contractor documentation and supporting test data should be incorporated into system control documents. Program and project EMC, vibration and acoustic requirements apply to COTS equipment utilized in GS. When program requirements exceed vendor specifications for vibration, acoustics and EMI, mitigations must be taken. Mitigations such as EMI rated enclosures and shielded cabling should be utilized to meet EMI requirements. Vibration isolation should be used to meet vibration and acoustic requirements.

4.1.2 Use of Flight Hardware in Ground Systems

Flight hardware will be considered acceptable to use as GS or as a component within GS if it meets all NASA flight hardware requirements.

Note that there are additional requirements in NASA-STD-8719.17 for PVS converted from flight to ground use.

4.1.3 Use of Flight Hardware Design Standards for Ground Systems

GS or components in GS designed in full compliance with NASA flight hardware standards are considered to be in accordance with this standards manual.

Those ground systems or components are designed as if they are flight hardware with all required inspections, lot traceability, testing, etc. Verification of the flight hardware requirements would then occur during the certification just as the ground requirements are verified during the GS certification (SAR or DCR).

4.1.4 Rotational or Production GSE

Rotational GSE or flight hardware production equipment used as GSE shall be approved by the KSC Technical Authority before use at KSC if the equipment was not designed and certified in accordance with NASA-STD-5005 or this standards manual.

GSE designed to NASA-STD-5005 or an OPRD approved tailored version of NASA-STD-5005 does not require approval.

4.2 Design for Operational Requirements

The GS design will support the program/project-specific operational requirements of flight systems.

In addition to operational requirements, GS should be designed for ease of production, manufacturing, construction, and inspection. GS should be designed to minimize the complexity and frequency of maintenance. Close manufacturing tolerances should be avoided unless required by design and performance.

4.3 Ground System Degradation and Contamination

GS shall not degrade, contaminate, or electronically interfere with flight systems, other GS, subsystems, or experiments while it is being used, checked out, serviced, or otherwise handled.

4.4 GS Design for Access

GS design will include access provisions for handling, servicing, calibrating, maintaining, and replacing components and limited-life items.

GS design should provide for ease of operation, maintenance, servicing, cleaning, and inspection of hardware and software. GS fault detection and isolation should be considered based on criticality and cost of failures.

4.5 Interfaces

- a. GS will meet the requirements of all interfaces with new or existing hardware or software as documented in interface control documents or any other documentation that controls interface requirements.

Interfaces should be verified by test, analysis, or both. As a design goal, the number of connections at interfaces should be minimized.

- b. Fluid, mechanical, or electrical connections in close proximity will be designed to prevent cross-connections.

Unique design configurations and clear identification marking should both be used to minimize the probability of incorrectly mating connections. Design configurations include threads, flanges, sizes, orientation (male/female, left-hand, right-hand), pins, and keys. Identification marking (see 4.8) should indicate function, commodities, pressure, reference designator, etc.

- c. GS will be compatible with all facility interfaces.

An assessment may be necessary in order to determine whether it is more cost-effective to modify the facility interface or design the GS to meet the existing facility interface. Some GS interfaces directly to the facility and some GS interfaces to GSS.

4.6 Design Life and Heritage Hardware

4.6.1 Design Life

GS will be designed for the operational life specified by program or mission requirements and identified in design drawings and maintenance documents.

Engineering documentation should specify maintenance requirements to meet design life.

4.6.2 Heritage Hardware

Existing GS verified to meet the GS requirements of a previous NASA program shall be considered acceptable for use without further verification against the requirements of this standards manual.

GSE requirements for previous NASA programs are defined in SW-E-0002, [NASA-STD-5005](#), SSP 50004, or a previous edition of this standards manual. The design life limitations of the heritage equipment still applies. This requirement is verified by documentation of the previous verification/certification (DCR).

4.7 Limited-Life Items

Items with limited life shall be identified in design documentation and annotated with the specific limitation to the life of the item.

Use of items with a projected lifetime that is less than the design life of the GS for which the items are intended should be avoided whenever possible. Elapsed time or cycle indicators should be employed to accumulate operational time or cycles for limited-life items. The age of items that are installed in a nonoperating mode should also be tracked.

4.8 Identification, Marking, and Labeling

4.8.1 Colors

The colors in Appendix B shall be used for GS designed and painted for NASA/KSC.

If the equipment is COTS, the colors in Appendix B should be used as guidance to make equipment consistent with other GS.

4.8.2 Marking and Labeling

GS shall be identified and marked in accordance with [KSC-STD-E-0015](#).

4.8.3 Load Capacity Marking

GS used for transportation, handling, and personnel access shall be conspicuously marked to indicate the maximum safe working load in accordance with [KSC-STD-E-0015](#), and for lifting equipment, [NASA-STD-8719.9](#).

4.8.4 Serial Numbers

Serial numbers or other unique identifiers shall be marked on those parts, components, or assemblies that contain limited-life items or that require periodic inspection, checkout, repair, maintenance, servicing, or calibration (e.g., pressure relief devices, pressure transducers or gages).

Reference designators (A-numbers) are used to identify location or function and cannot be used as unique identifiers.

4.9 Interchangeability

Hardware assemblies, components, and parts with the same part number will be physically and functionally interchangeable.

4.10 Safety

All GS will be designed and fabricated in accordance with [29 CFR 1910](#), [29 CFR 1926](#), and [NPR 8715.3](#).

4.10.1 Hazard Analysis

A hazard analysis will be conducted in accordance with program-defined methodology as part of the GS design process to identify, mitigate, and control hazards. In the absence of a program-defined methodology, [KNPR 8700.2](#) will be used.

4.10.2 Safety Requirements on KSC Property

GS to be used at KSC will meet the safety requirements of [KNPR 8715.3-1](#).

4.10.3 Safety Requirements on Air Force Property

GS to be used on Air Force property will meet the requirements of [AFSPCMAN 91-710](#).

4.10.4 Safety Requirements on Other NASA Property

GS to be used at other NASA facilities will meet the safety requirements of those facilities.

4.10.5 Caution and Warning Indications

GS shall provide caution and warning indications to alert personnel of impending or existing hazards.

GS should be designed to allow efficient implementation of the applicable Occupational Safety and Health Administration lockout/tagout requirements.

4.10.6 Fall Protection

GS designs shall incorporate fall protection as required by [KSC-STD-S-0033](#) and [ASSP Z359.1](#).

4.10.7 Hazmat Suits

Hazmat suits, also known as self-contained atmospheric protective ensemble (SCAPE) suits and propellant handler's ensemble (PHE), shall conform to [NFPA 1991](#), Level A, or to [ISO 17491](#) (-1, -2, or -3), and as required by [29 CFR 1910.120](#), [Appendix B](#).

4.11 Reliability

GS should be designed to minimize the probability of system failure and reduce the severity of the failure effect of the system, including failures caused by operator errors and human-system interaction.

Procedures and instructions to perform and document analyses, such as Failure Mode and Effects Analysis (FMEA)/Critical Items List (CIL) or sneak circuit analysis, will be in accordance with Program requirements.

4.11.1 Redundancy

- a. Critical redundant hardware systems, subsystems, or components shall be physically oriented or separated such that the failure of one will not prevent the other from performing its intended function.
- b. Critical redundant hardware systems, subsystems, or components shall be designed such that common-cause failures (e.g., contamination) do not simultaneously eliminate redundancy.
- c. The design of critical redundant hardware systems shall provide methods for verifying each redundant element without compromising the reliability of the redundant system.

Simultaneous failure of identical components is not considered a credible failure of redundancy unless the failure is a result of a simultaneous external effect such as contamination, launch vibration, or EMI. Common software used across redundant strings are vulnerable to common cause failure. However, rigorous verification testing may reduce the risk to acceptable levels.

4.11.2 Failure Tolerance

- a. GS, except primary structure and pressure vessels/piping/tubing in rupture mode, shall be designed to sustain a failure without causing loss of life or damage to support equipment, facilities, or flight hardware (fail-safe).

Failure tolerance is not possible for primary structure and pressure vessels/tubing in rupture mode. The safety of these systems is achieved by applying design requirements contained in this standards manual.

More stringent fault-tolerance requirements (e.g., two-fault tolerance for loss of flight crew) may be applicable depending on program requirements. GS should be designed such that no single failure/inadvertent operator action results in injury or in damage to or loss of ground equipment, flight equipment, or facilities. Failure modes/inadvertent operator actions are controlled using a systematic application of approved standards and design margins.

GS may be designed to terminate operations autonomously after the first failure or inadvertent operator action and in time to preclude any scenario that results in loss of life. This approach is consistent with the historical use of the term "fail-safe" in GS design.

- b. GS shall be designed to sustain a failure and still perform its basic function (fail-operational) when necessary to meet safety or operational requirements.

Purges, ground special power, and launch release systems are examples of systems that interface with other systems whose loss would propagate failures. Requirements for availability of system functions during launch processing may necessitate fail-operational design.

- c. GS failure modes/inadvertent operator actions with the potential for loss of flight crew will be addressed in accordance with [NPR 8705.2](#).

4.11.3 Failure Propagation

GS shall be designed such that failures will not be propagated to the flight systems.

The design of GS should consider how flight hardware/software failures could propagate through the GS and affect other flight systems (vent systems, etc.).

4.11.4 System Safety and Reliability Analysis

System Safety and Reliability Analyses will be performed concurrently with GS designs in accordance with [KNPR 8700.2](#).

4.11.5 Modeling and Simulation of Critical GSE

When invoked by a program, [NASA-STD-7009](#) will be used for mathematical modeling and simulation of critical GSE that is not verified by the results of testing.

This requirement applies to physics-based modeling and simulations only (e.g., finite element analysis and computational fluid dynamics) and does not apply to descriptive modeling such as computer-aided design models, visualization models, or software models.

4.12 Environments

GS shall be designed to perform in the natural and artificial environments to which it will be subjected during its life cycle.

4.12.1 Natural Environment

GS used or stored in an exterior environment shall be designed to function after exposure to the natural environment at its respective geographical location as specified in [NASA/TM-2008-215633](#) or a Program specified natural environments document.

Specifications in [NASA/TM-2008-215633](#) may be tailored to reflect program-defined risk and exposure times, including operation within the launch commit criteria of the vehicle. Purging enclosures to protect GS components from the natural environment should be considered essential, in addition to purging enclosures in hazardous areas as required in 9.13. Programs may substitute a specific document for natural environments based on their own requirements.

4.12.2 Interior Environment

GS designed to function within a controlled interior environment shall be designed to the following temperature and humidity requirements:

- Temperature: +15 °C (60 °F) to +27 °C (80 °F) and within the extremes of +11 °C (52 °F) to +40 °C (104 °F) for a maximum of 1 hour.
- Humidity: nominal 55%, within a range of 30% to 70%.

Some uncontrolled interior environments exceed the most severe exterior environment (e.g., an enclosed trailer or shed). An uncontrolled interior environment may be 11 °C (20 °F) above the temperature for the exterior natural environment with the humidity of the natural environment.

4.12.3 Vehicle Assembly Building Environment

GS stored and used in the Vehicle Assembly Building shall be designed to function in the natural (exterior) environment at KSC.

4.12.4 Fire/Explosion Hazardproofing

If GS is operated in locations where fire or explosion hazards exist, as defined by [NFPA 70, Article 500](#), it shall be hazardproofed in accordance with the requirements in [KSC-STD-E-0002](#).

4.12.5 Environmental Test Methods

Test methods and conditions required for testing and qualification of GS components for natural environments shall be in accordance with [KSC-STD-164](#).

[MIL-STD-810](#) covers most environmental test methods. The technical authority decides which tests apply to individual components or subsystem.

4.12.6 Seismic Environment

GS used in a seismically active areas shall be designed to resist the effects of a seismic event using the criteria and guidelines in [ASCE-7](#).

KSC and Cape Canaveral Air Force Station are not considered to be in a significantly seismically active area.

Facility-type systems are not typically designed to launch environments. Facility systems located within the Pad perimeter should be designed to the seismic requirements of [ASCE-7](#), classified as either non-building structures or nonstructural components with Importance Factor, $I_p=1.5$ to account for launch vibration environments.

4.13 Launch Induced Environments

4.13.1 Launch-Induced Environment and Launch Loads

- a. GS required to function during or after exposure to the launch-induced environment shall be designed to withstand the environment defined in program-specific documents.
- b. Testing of GS for launch-induced environment shall be applied in accordance with [KSC-STD-164](#).

The technical authority decides which tests apply to individual components or subsystem.

- c. GS not required to function after exposure to the launch-induced environments or after launch loads shall not cause damage or create a hazard to flight hardware, facilities, other GS, personnel, or the environment.

Launch induced environments and launch loads include vibration and acoustics created by engine ignition, buildup, launch, and also from GSE function such as umbilical arm retraction, pyrotechnic devices release, etc.

COTS and facility-type systems within the launch pad perimeter should be selected for seismic environments to account for launch induced environments.

4.13.2 Launch Vibration Loads

GS shall be designed to withstand the predicted launch vibration environment in accordance with one of the following methods:

This requirement applies to GSS and GSE subsystems, not primary Pad or mobile launcher structures.

- Full response analysis using the predicted power spectral density from 2 to 2000 Hz.
- Static analysis using the structural requirements of this standards manual with an applied load of three times the GRMS from the predicted PSD from 2 to 2000 Hz.
- Vibration test with the predicted PSD plus an additional 3dB from 2 to 2000 Hz for a duration of 10 seconds for one planned launch plus 5 seconds per additional launch in the GS design life per axis/direction or a Program-specified duration.

If the provided PSD is a qualification level PSD, then the test is performed at the provided PSD level without the addition of 3dB. The response analysis and equivalent static analysis would then use the qualification PSD minus 3 dB. The PSD in the units of g^2/Hz is the acceleration spectral density (ASD) for a vibration test.

4.13.3 Launch Acoustic Loads

GS components and assemblies shall be designed to withstand the predicted launch acoustic environment in accordance with one of the following methods:

Primary structure does not respond to acoustic loading. This requirement applies to GSS and GSE subsystems, pneumatic panels, electrical enclosures, or other lightweight structural assemblies with large collector areas. Individual components may be susceptible to acoustic loads. Determining which components are susceptible requires insight into the construction of the component.

- Individual components that are susceptible to acoustic loads are tested at the predicted acoustic level for a duration of 10 seconds for one planned launch plus 5 seconds per additional launch in the GS design life or a Program-specified duration.
- Complete systems and structures have a full response analysis using the predicted power spectral density above 2000 Hz.
- In the absence of an acoustic load analysis, subsystems and subsystem structures exposed to launch environments shall be designed for an equivalent static load of 2 psi pressure.

The 2 psi screening load has been used successfully for several NASA programs for structures small enough to react coherently to acoustic loads, such as pneumatic panels and frames and sheet metal enclosures. This load may be applied as a net load, but is generally applied as a pattern of +2 psi and -2 psi loads that create no net force on the structure's foundation or supports.

4.14 Human Factors

- a. GS shall comply with human factors criteria established from [HF-STD-001](#) based on human interaction with the system.
- b. GS will comply with [29 CFR 1910](#).

Human factors criteria may be established by the design organization as a checklist or other simplified implementation of the HF-STD-001 standard.

4.15 Documentation

Documentation in Appendix C should be released and made available to the user.

4.15.1 Drawings and Specifications

- a. Drawings and specifications required for the fabrication, construction, installation, modification, test, operation, maintenance, sustaining, and use of GS shall be prepared in accordance with drawing practices equal to or more stringent than the engineering drawing practices of [ASME Y14.100](#) and [KSC-GP-435, Vol. I](#).

For facility-format drawings (typically provided by A&E firms), the above requirement is met by applying the United States National CAD Standard from the National Institute for Building Sciences.

- b. Before beginning fabrication or contract award, drawings and specifications for fabrication shall be approved by the Technical Authority and put under configuration control.

Completed drawings and specifications in an unapproved state may be used for bidding purposes only.

4.15.2 Technical Documentation

Technical documentation (e.g., manuals and reports) will be prepared in accordance with [KSC-DF-107](#).

4.16 Spares and Limited-Life Items

- a. GS design documentation shall identify limited-life items, spare parts, components, and materials necessary to support construction, fabrication, installation, test, and operation.
- b. Limited-life items shall be controlled from the date of their manufacture through turnover, including the time they are in storage.
- c. GS design documentation shall provide instructions for replacement of those parts, components, and materials.

4.17 Qualification

All critical components used in GS shall undergo qualification to verify performance in their intended environment.

KSC-STD-G-0003 should be used for the qualification testing.

4.18 Quality Assurance

Quality assurance is the function that verifies the compliance of hardware and software with specified requirements. Quality assurance includes quality engineering and quality inspection. KSC minimum requirements and best practices are given in [KNPR 8730.2](#).

4.18.1 General

GS design will incorporate quality requirements in accordance with the program's/project's S&MA Plan.

4.18.2 Definition of Quality Requirements

Quality requirements shall be defined on the engineering drawings or in other technical documents that are included in the design, fabrication, or installation contract.

The design documentation should include special quality-related requirements, such as any special processes, certification of personnel or special testing that should be conducted, and any other special requirements that are necessary to produce a quality product.

4.18.3 Personnel Training

Certification documentation for required training of personnel performing processes during fabrication, assembly, installation, and testing of GS shall be maintained.

4.18.4 Testing

- a. Testing requirements shall be specified in engineering documentation.
- b. Testing will verify compliance with the applicable specifications and the ability of the GS to perform its required design functions.
- c. Test documentation, data, and results will be produced, maintained, and archived in accordance with [KNPR 8730.2](#) and program or project requirements.

4.18.5 Metrology and Calibration

Metrology and calibration of the following will be in accordance with [KNPR 8730.1](#):

- a. All test equipment and tools used in support of fabrication, assembly, installation, and test of GS.
- b. Instrumentation used for measurements for control and monitoring of GSE.

4.18.6 Quality Conformance Verification

Documentation shall be provided by the design organization (see Appendix C) to verify compliance with this standards manual in accordance with the program/project verification plan.

Test, analysis, demonstration, and inspection (including similarity) are recommended methods to verify that each requirement of Sections 4 through 10 has been satisfied.

4.19 Packaging, Handling, Storage, and Transportation

Requirements for packaging, transporting, shipping, and handling will be in accordance with [NPR 6000.1](#).

GS should be designed to be transported by ground, air, or sea, using commercially available methods.

4.19.1 Transportation Loads

- a. Transportation equipment shall be designed so that loads imparted to flight hardware do not exceed 80% of the flight limit loads.

Transportation loads should be evaluated early in the design cycle since they may be the governing design load case.

- b. Transportation loads in [Table 1](#) shall be used based on the mode of transportation.

Table 1. Transportation Loads

		Direction		
		Forward (g)	Lateral (g)	Vertical (g)
Transportation Method	Boat/Barge	±0.75	±1.0	+2.5/-0.5
	Air (nominal)	±3.0	±1.5	+3.0/-1.0
	Air (Crash)	+9.0/-1.5	±1.5	+4.5/-2.0
	Truck	±2.0	±2.0	+3.0/-1.0
	Rail, Humping	±30.0	±5.0	±15.0
	Rail, Normal Operation	±3.0	±1.5	+3.0/-1.0
	Dolly/Airbearing	±1.0	±1.0	±1.0
	Specialized multi-wheel, low speed transport vehicle (i.e. Kamag)	+1.0 braking -0.5acceleration	±0.25	+1.25/-0.25
	Forklift	±1.0	±0.5	+2.0/-0.0
	Crane/Hoist	±0.1	±0.1	±1.33

Note 1 – Vertical (+) acceleration is up, vertical (-) acceleration is down. (+) acceleration means the force (barge deck, truck bed, etc.) is pushing up on the GSE and flight hardware. To properly apply these (+) loads in an analysis tool or free-body diagram, the GSE/flight hardware is constrained at the barge/truck/train interface, and a load equal to the (+) vertical load factor is applied down in the direction of gravity.

Note 2 – All (+) loads or all (-) loads for a transportation method occur simultaneously in each of the three directions.

Note 3 – Loads are to be applied at logical center-of-gravity (CG) locations, including all mass in the load path, depending on what is being analyzed. The following is an example: An engine is being shipped in a container on a truck, and the engine is supported within the container by a support structure. Load factors are applied at the engine and support structure CG when analyzing the support-structure-to-container interfaces. Load factors are applied to the engine/support structure/container CG when analyzing the container-to-truck interfaces.

Note 4 – All vertical loads include 1.0g for gravity.

4.19.2 Shipping and Storage Containers

- Containers designed to protect or transport flight hardware or critical GSE will be compatible with onsite transportation, handling, and storage methods.
- Container attachment points will be provided for crane hoists and tie-downs.

- Containers will be marked in accordance with [NPR 6000.1](#) so that contents can be identified without opening the container.
- *Containers should be designed so that indicators that require monitoring (e.g., desiccants, humidity monitors, shock meters, and tilt meters) can be monitored without opening the shipping container.*

Containers having a gross weight of more than 65 kilograms (kg) (144 pounds [lb]) should be provided with integral skids or pallets for shipment.

4.19.3 Parts Protection

- a. Procedures will be employed to protect parts during manufacturing and in-plant handling and storage.

Any procedures, methods, materials, and devices (such as carts, boxes, containers, or transportation vehicles) that are used to protect parts should be standardized to prevent damage to hardware.

- b. Precision-cleaned parts will be packaged in accordance with [NPR 6000.1](#) and program contamination control requirements.

4.19.4 Pyrotechnic Devices

The handling and storage of pyrotechnic devices will be in accordance with [NASA-STD-8719.12](#).

5. MATERIALS AND PROCESSES

For noncritical GS, approval by the responsible M&P authority of the engineering drawing authorizes deviations from other M&P requirements of this standards manual.

- a. The design drawings shall be approved by the responsible M&P authority.
- b. M&P used in the design and fabrication of GS will be selected by considering the worst-case operational requirements for the particular application and the design engineering properties of the candidate materials.

For example, the operational requirements should consider operational temperature limits, loads, contamination, life expectancy, exposure to moisture or other fluids, corrosive environments, and launch-induced and natural environments. Properties that should be considered in material selection include mechanical properties, fracture toughness, flammability and offgassing characteristics, corrosion and stress corrosion resistance, thermal- and mechanical-fatigue properties, glass-transition temperature, mismatches between coefficients of thermal expansion, vacuum outgassing, fluid compatibility, microbial resistance, moisture resistance, fretting, galling, and susceptibility to electrostatic discharge (ESD) and contamination.

- c. All materials and processes will be defined by standards and specifications and be identified directly on the appropriate engineering documentation.
- d. Composition and properties of all materials and parts will be certified by the manufacturer or supplier as required by the procuring document.
- e. The Materials and Processes Technical Information System (MAPTIS) will be consulted to obtain material codes and ratings for materials, standard and commercial parts, and components that are used in hypergolic propellant or oxygen-enriched systems or that are exposed to ignition sources.

5.1 Flammability Control

Materials used for flammability control shall be nonflammable or self-extinguishing in their use configuration as defined by [NASA-STD-6001](#), Test 1, Test 4, or Test 10.

Flammability control is the principle of material selection to specifically prevent the initiation or spread of combustion. Material flammability ratings and tests based on [NASA-STD-6001](#) are available in the MAPTIS database for many materials.

The following materials or methods are also acceptable for flammability control:

- (1) *Ceramics, metal oxides, and inorganic glasses are acceptable without prior testing due to their chemically inert nature.*
- (2) *When a material is sufficiently similar (chemically and physically) to a material found to be acceptable by testing in accordance with [NASA-STD-6001](#), this material may be used without additional testing if its use is approved by the responsible M&P authority.*
- (3) *Materials whose flammability and self-extinguishing properties have been tested in accordance with [NASA-STD-6001](#) under conditions more severe than those encountered in the use environment are acceptable without further testing, as in the following examples:*
 - (a) *Materials used in an environment with an oxygen concentration lower than the test level are acceptable without further testing (provided that the oxygen partial pressure is not greater than the partial pressure at the test level).*
 - (b) *Materials used in an environment where the concentration is greater than the test level should be retested or considered flammable.*
 - (c) *If a material passes the flammability test on a metal substrate, it should be used on metal substrates of the same thickness or greater.*

- (d) *If the material will be used on a thinner or non-heat-sinking substrate (or on no substrate at all), it should be retested or considered flammable.*

Many situations arise in which flammable materials are used in an acceptable manner without testing, but such uses require mitigation practices and should be approved by the responsible M&P authority. Guidelines for assessment and mitigation of hardware flammability characteristics can be found in JSC 29353.

5.2 Fungus Resistance

The use of elastomers and polymers in GS subjected to a humid environment (relative humidity equal to or greater than 60%) will be approved by the responsible M&P authority in accordance with the elastomeric material section of this document.

For GS used in a humid environment, material selection should meet one the following criteria:

- *Materials are selected from fungus-inert materials (Group I) identified in [MIL-STD-810](#). Fluorocarbon polymers, ethylene tetrafluoroethylene (ETFE), and silicones are considered acceptable.*
- *Materials are used inside environmentally sealed containers with less than 60% relative humidity at ambient conditions, or materials are used inside electrical boxes where the temperature is always equal to or greater than the ambient cabin temperature, or only the edges of materials are exposed.*
- *Materials are tested for fungus resistance in accordance with [MIL-STD-810](#) and receive a rating of 0 or 1.*
- *Materials are treated to prevent fungus growth in a manner that does not adversely affect the unit's performance or service life and are protected from environments that would leach out the protective agent.*

Materials not meeting one of these criteria should be identified in the design documentation along with any action required, such as periodic inspection, maintenance, or replacement of the material.

5.3 Nondestructive Evaluation

Typical nondestructive evaluation (NDE) methods include dye penetrant, magnetic particle, radiographic, ultrasonic, and eddy current testing. NDE inspection is not limited to these methods and may include additional methods such as leak testing, and advanced methods such as shearography and thermography, as required.

- a. All NDE of welds shall be performed in accordance with the applicable welding specification.
- b. Unless otherwise specified by a governing discipline standard (e.g., the ASME Boiler and Pressure Vessel Code or a standard of the American Institute of Steel Construction,

qualification and certification of personnel involved in NDE shall comply with [AWS D17.1](#).

- c. NDE of **non**fracture-critical base materials shall be in accordance with the ASTM test method appropriate for the product form.
- d. NDE for fracture-critical metallic GS components shall be performed in accordance with [NASA-STD-5009](#).

5.4 Metals

5.4.1 Carbon and Low-Alloy Steel

The ductile-to-brittle transition temperature exhibited in steels should be considered when using carbon and low-alloy steels in hardware operating in or exposed to low temperatures while in service. For some alloys, the transition temperature may be as high as the ambient temperature.

- a. Because of their sensitivity to stress corrosion cracking (SCC), carbon and low-alloy steels heat-treated to strength levels at or above 1240 MPa (180 ksi) ultimate tensile strength (UTS) shall be approved by the responsible M&P authority.
- b. Steel parts shall be heat-treated to meet the requirements of [SAE AMS-H-6875](#) or [SAE AMS 2759](#) or a process approved by the responsible M&P authority.
- c. When acid cleaning baths are used for steel parts, the parts shall be baked in accordance with [SAE AMS 2759/9](#) to alleviate potential hydrogen embrittlement problems.

5.4.2 Corrosion-Resistant Steel

- a. Free-machining alloys such as UNS S30300 (type 303 stainless steel) and UNS S30323 (type 303Se stainless steel) used in corrosive environments shall be approved by the responsible M&P authority.

Standardized testing has shown 303/303Se stainless steel to be resistant to SCC. Local KSC environment testing has shown a susceptibility to SCC for these free-machining grades.

- b. Cleaning, descaling, and passivating of stainless-steel parts, assemblies, equipment, and installed systems shall be in accordance with [ASTM A967](#).

Note that ASTM A967 requires ASTM A380 for cleaning and descaling.

Unstabilized austenitic steels should not be used under conditions where the temperature is above 370 °C (700 °F) due to sensitization.

Welding should be performed only on low-carbon, stabilized grades or superaustenitic grades. Welding higher-carbon, unstabilized austenitic stainless steel can result in sensitization in the weld heat-affected zone. Exercise caution in using martensitic and ferritic stainless steels because these are susceptible to hydrogen embrittlement, corrosion, and stress corrosion.

Austenitic stainless steels may be susceptible to pitting corrosion and crevice corrosion in a marine environment.

Hardware should be designed to avoid fretting or wear of stainless-steel alloys. Lubricants and lubricated coatings should be considered for use with stainless-steel materials in applications where they come into contact through a sliding movement.

Stainless-steel alloys (such as Nitronic 60) that resist galling should be considered as alternatives.

5.4.3 Aluminum

Hardware made with aluminum alloys should not be loaded through the short transverse grain direction because resistance to SCC is at a minimum in that direction.

- a. Aluminum alloys used in structural applications shall be resistant to general corrosion, pitting, intergranular corrosion, and SCC.
- b. Heat treatment processes specified for aluminum alloy parts will meet the requirements of a voluntary consensus standard approved by M&P for the specific application.

Common standards used for the heat treatment of aluminum alloys include SAE AMS 2770, SAE AMS 2771, and SAE AMS 2772.

5.4.4 Nickel-Based Alloys

- a. Alloys with high nickel content are susceptible to sulfur embrittlement; therefore, any foreign material that could contain sulfur, such as oils, greases, and cutting lubricants, shall be removed before heat treatment, welding, or high-temperature service.
- b. Heat treatment of nickel-based alloy parts will meet the requirements of [SAE AMS 2774](#).

Some of the precipitation-hardening superalloys are susceptible to depletion of the alloying element at the surface in a high-temperature, oxidizing environment. This effect should be carefully evaluated when a thin sheet is used, since a slight depletion could involve a considerable proportion of the cross section of the material.

5.4.5 Titanium

- a. Areas subject to fretting or wear shall be anodized or hard-coated using a wear-resistant material such as a tungsten carbide/cobalt thermal spray.

Titanium anodization should be in accordance with SAE AMS 2488. Titanium and its alloys exhibit very poor resistance to wear. Fretting may cause cracking, potentially leading to fatigue failure. The design should avoid fretting or wear in titanium and its alloys.

- b. Titanium alloys shall not be used with LO₂ or GO₂ at any pressure or with air at oxygen partial pressures above 35 kPa (5 psia).

- c. Heat treatment processes specified for titanium and titanium alloy parts will use a process approved by M&P for the specific application.
- d. *The surfaces of titanium and titanium alloy mill products should be 100% machined, chemically milled, or pickled to a sufficient depth to remove all oxygen-contaminated layers (alpha case) formed as a result of mill processing, heat treating, and forming operations at elevated temperatures.*

Heat treatment of titanium should use SAE AMS-H-81200. The use of titanium in hydrochloric acid, chlorinated solvents, chlorinated cutting fluids, fluorinated hydrocarbons, and anhydrous methyl alcohol should be avoided because of titanium's susceptibility to SCC. Contact of titanium alloys with mercury, cadmium, silver, or gold should be avoided at certain temperature ranges because of liquid-metal-induced embrittlement, solid-metal-induced embrittlement, or both.

5.4.6 Copper Alloys

- a. Copper alloys, brasses, and bronzes used in GS shall be resistant to general corrosion and pitting, and highly resistant to SCC in accordance with [MSFC-STD-3029](#).
- b. To prevent SSC, copper alloys shall not be used in contact with ammonia.

GS should be designed so that copper is not exposed to hydrazine environments. Copper has the potential for SCC when exposed to ammonia, which is a product of hydrazine decomposition.

5.4.7 Beryllium and Beryllium Alloys

Machining, grinding, and finishing operations on beryllium and beryllium alloys shall be performed either wet, using a liquid coolant with local ventilation, or dry, using high-velocity, close-capture ventilation.

Beryllium copper (UNS C17200) is commonly used for high-strength, nonsparking structural components in applications where it is subject to contact and wear. Beryllium particles, beryllium oxide, and other beryllium compounds are toxic when inhaled. Extreme caution must be exercised during fabrication to avoid exposing personnel to beryllium or beryllium compounds. Refer to the appropriate Safety Data Sheet (formerly known as Material Safety Data Sheet) for more detail.

5.4.8 Tin

Tin solder and tin plating should be alloyed with at least 3% lead to prevent the growth of tin whiskers. Requirements for lead content for electrical or electronic applications are contained in the electrical soldering section.

5.4.9 Plating

Galvanized coatings and other metallic plating shall be applied in accordance with a voluntary consensus standard approved by M&P for the specific application.

Galvanized coatings should be in accordance with ASTM A123, ASTM A153, and ASTM A653. Repairs to galvanized coatings should be in accordance with ASTM A780.

Chromium plating should be in accordance with SAE AMS 2460.

Cadmium plating should be in accordance with SAE AMS-QQ-P-416.

5.4.10 Corrosion Control

Protective coating of hardware should be appropriate to the condition, use, and environment to which the hardware will be exposed during its life cycle. The coating should minimize corrosion and its color should indicate its use (see Appendix B). Guidelines for corrosion control for facilities, systems, and equipment are given in TM-584.

- a. Protective coating and sealing of hardware shall be in accordance with [NASA-STD-5008](#).
- b. The principles contained in MIL-STD-889 will be used for corrosion control of galvanic couples in corrosive environments.

[NASA-STD-5008](#) covers sealing for critical GS, faying surfaces of metal alloys and electrical bonding connections, except for nickel-plated surfaces.

5.4.11 Stress Corrosion Cracking

In critical applications, metals exposed to the KSC environment shall be selected from alloys that are highly resistant to SCC as specified in [MSFC-STD-3029](#).

In noncritical applications, the designer should select from alloys that are highly resistant to SCC as specified in [MSFC-STD-3029](#). When COTS items are selected, the designer should attempt to identify the materials used and determine if an SCC failure would be critical. Materials protected from the environment, such as lubricated roller bearings and gears within a sealed gearbox, are exempt from the above requirement. The responsible M&P authority's signature or electronic approval of the design drawings constitutes authorization to use the materials of the design in the intended application.

5.4.12 Hydrogen Embrittlement

The embrittlement of a metal or alloy by hydrogen involves the diffusion of atomic hydrogen into a component subject to a manufacturing process or environmental event. The entrained hydrogen reduces the ductility of the metal and load-bearing capacity, resulting in brittle fracture at stresses below the yield stress of susceptible materials.

Hydrogen can be introduced by processes such as electroplating, phosphating, pickling, passivation, and welding. Hydrogen can also be introduced as a by-product of a corrosion reaction in which some of the hydrogen enters the metal in atomic form.

All metallic materials used in hydrogen systems in GS shall be approved by the responsible M&P authority.

Test data may have to be generated in a simulated environment to support the approval rationale. Guidelines for designing safe hydrogen systems are contained in AIAA G-095.

After electroplating, phosphating, pickling, passivation, or other processes that can introduce hydrogen, materials that are susceptible to hydrogen embrittlement should undergo a final baking heat treatment in accordance with [SAE AMS 2759/9](#).

5.5 Nonmetals

5.5.1 Elastomers

The use of elastomers in GS shall be approved by the responsible M&P authority.

Elastomers should be in accordance with MIL-HDBK-149. Elastomers should operate within the parameters of a design service life, including the vendor-specified shelf life. Elastomers should be cure-dated for tracking purposes. Elastomers should not have a corrosive effect on other materials when exposed to conditions normally encountered in service (examples include one-part silicones that liberate acetic acid when they are cured). When rubbers or elastomers are used at low temperatures, the ability of these materials to maintain the required elastomeric properties should be verified by testing them at or below use temperature.

5.5.2 Composite Materials

- a. Composite materials used in GS shall be in accordance with [SAE CMH-17](#) and with MIL-HDBK-17, Volumes 4 and 5.
- b. Defects resulting from manufacturing will be assessed through NDE techniques to meet the intent of 5.3.

5.5.3 Refractory Concrete

Refractory concrete used for heat and blast protection of flame deflectors and other areas of the launch pad shall be in accordance with a detailed procurement specification including

compressive strength, erosion rate testing in a representative environment (i.e. 3,300 Btu/square foot-second), fineness, etc.

Refractory Concrete should have a modulus of rupture greater than 500 psi, compressive strength greater than 4,500 psi, a fineness modulus of 2.75 to 3.75, and survive a heat flux of 3,300 BTU/Ft²-s for ten seconds with less than 0.125-inch of thickness loss.

5.5.4 Lubricants

NASA-TM-86556, Parts A and B, should be used in evaluating and selecting solid and liquid lubricants for GS. Guidelines on additional lubricants are contained in NASA/CR-2005-213424. Long-life performance should be considered when selecting lubricants. Use of lubricants near precision-cleaned hardware or electrical connections should be minimized or tightly controlled to prevent cross-contamination.

Lubricants containing chloro-fluoro compounds shall not be used with aluminum or magnesium.

The decomposition/reaction products that result from overheating lubricants that contain chloro-fluoro compounds can attack metallic materials and can be toxic. Examples of chloro-fluoro compound lubricants include many vacuum oils, chlorotrifluoroethylene (CTFE)-based grease and oil, halocarbon lubricants, and chlorofluorocarbon-based lubricants.

Lubrication of flared tube fittings is covered in the Fluids Section and will be in accordance with [KSC-SPEC-Z-0009](#) which is required in [KSC-SPEC-Z-0008](#).

5.5.5 Plastic Film, Foam, and Adhesive Tape

- a. Thin PFA materials used in GS that could be exposed to hypergols shall be tested in accordance with and meet the requirements of [NASA-STD-6001](#), Test 15 (A2.7).
- b. Thin PFA materials used in GS in close proximity to ESD-sensitive components shall be tested for ESD in accordance with [ASTM D4470](#) or an M&P-approved test method.

MMA-1985-79 is an M&P-approved alternative ESD test method. Material flammability ratings and hypergol compatibility test results for many PFAs are found in the MAPTIS database. KTI-5212 may be consulted for a summary of flammability, ESD, and hypergol compatibility test results for various PFAs.

Thin plastic film, foam, and adhesive tape (PFA) materials used in GS for flammability control require testing to meet the requirements of NASA STD 6001 in accordance with the Flammability Control section of this document.

5.6 Contamination Control

- a. Engineering documentation shall specify internal and external surface cleanliness levels for all GS.
- b. When required by the program, a contamination control plan will be generated in accordance with [ASTM E1548](#).

Clean rooms and associated controlled environments should be designed in accordance with ASTM E2217.

6. STRUCTURAL REQUIREMENTS

6.1 Material Properties

- a. Material properties for design shall be based on the material composition, physical properties, and mechanical properties from the voluntary consensus standard used in the procurement of the material.

For example, if stainless-steel plate is procured to a particular ASTM specification, the mechanical properties used for analysis are taken from that particular ASTM specification.

- b. When lot testing indicates mechanical properties greater than the specification minimum values, the values used for design and analysis shall be less than the specification value plus one half of the increase above the specification value and the design documentation is annotated with the new design minimum value.

$$\sigma_{\text{yield design}} = (\sigma_{\text{yield spec}} + \sigma_{\text{yield measured}}) / 2.0$$

- c. If mechanical properties of new or existing structural materials are not available, the properties will be determined by analytical methods approved by the M&P technical authority to satisfy the intent of (a) above.

6.2 Threaded Fasteners

This section addresses the design of and maximum allowable preload for threaded fasteners. The design application may require a lower preload value because of actual applied loads, gaskets, seals, etc. Other sources for installation/torque criteria include MSFC-STD-486 and [KSC-SPEC-Z-0008](#). For nonstructural applications where a specific clamping force is not required, the designer may specify that fasteners be installed snugtight (tighten the fastener with standard tools, using ordinary force, until the assembly layers come into firm contact, determined visually and by feel).

- a. Fastener preload stress shall be less than 70% of the yield stress on the net cross section.
- b. The installation criteria for structural bolts in conventional steel structures, such as those specified in [ASTM A325](#) and [ASTM A490](#), shall be in accordance with [AISC 325](#).

- c. [ASTM A490](#) structural bolts or bolts of similar material composition and tensile strength (e.g., SAE Grade 8 or ISO Class 12.9) shall not be used in a corrosive environment.

Galvanizing and some zinc coatings may cause hydrogen embrittlement in high-strength carbon steel fasteners that is difficult to detect. When possible, [ASTM A325](#) or SAE Grade 5 fasteners should be used instead. When Grade 8 or A490 fasteners are required, consider [ASTM F1136](#), Class 3 for a protective coating system (with M&P approval).

- d. Fastener installation criteria (e.g. torque value, lubrication, etc.) shall be documented on the fabrication, assembly, or installation drawing.

6.3 Welding

Welding of structural GSE shall meet all requirements for nonflight hardware in [AWS D17.1](#) with the exception of pressure systems.

Welding of pressure systems is covered by ASME BPVC and [ASME B31.3](#). The selection of parent materials and weld methods for GSE should be based on consideration of the weldments, including adjacent heat-affected zones, because they affect the operational capability of the parts concerned. Welding procedures should be selected to provide a weld of the required quality, to use the minimum amount of energy, and to protect the heated metal from contamination.

6.3.1 Weld Classification and Inspection

- a. Welds shall be classified and inspected as Class A when characterized as a single-point failure with no redundancy for the redistribution of load or whose failure would be catastrophic.
- b. Welds shall be classified and inspected as Class B when failure would reduce the overall efficiency of the system, but loss of system function or hazard to personnel would not be experienced.
- c. Welds shall be classified and inspected as Class C when failure would not affect the efficiency of the system or create a hazard to personnel.

6.3.2 Welder/Welding Operator Performance Qualification

- a. Welders and welding operators shall be qualified prior to production welding.
- b. Welder/welding operator performance qualifications (WPQs) shall be approved by an M&P engineer authorized by NASA prior to production welding.

6.3.3 Welding Procedure Qualification

- a. Welding procedure specifications (WPS) shall be prepared and qualified for each weld prior to production welding.

A WPS is always required, even if the procedure is considered to be prequalified by an applicable American Welding Society standard. WPSs for stainless steels and nickel alloys must always be qualified by testing.

- b. WPSs and procedure qualification records (PQRs) shall be approved by an M&P engineer authorized by NASA prior to production welding.

6.4 Structural Brazing

Structural brazing shall be conducted in accordance with [AWS C3.3](#) with a process for the specific application approved by M&P.

The following should be used as guidance for creating the process:

- *Follow AWS C3.7 for brazing of aluminum alloys.*
- *Follow AWS C3.4, C3.5, and C3.6 for torch, induction, and furnace brazing.*
- *Subsequent welding operations in the vicinity of brazed joints or other operations involving high temperatures that might affect the brazed joint should be prohibited unless it can be demonstrated that the fixturing, processes, methods, or procedures employed will preclude degradation of the brazed joint.*
- *Brazed joints will be designed for shear loading and, for structural parts, not be relied upon for strength in axial loading.*
- *Follow AWS C3.2 to establish the shear strength of brazed joints.*
- *For furnace brazing of complex configurations, such as heat exchangers and cold plates, destructive testing will be conducted on preproduction brazed joints to verify that the brazed layer that extends beyond the fillet area is continuous and forms a uniform phase.*
- *[ASME BPVC-VIII](#) covers requirements for brazing of pressure vessels.*

6.5 Forging

- a. For critical GS, after the forging technique (including degree of working) is established, the first production forging shall be sectioned to show the grain-flow patterns and to verify mechanical properties.
- b. The procedure shall be repeated after any change in the forging technique.
- c. The resulting data shall be retained and made available for review by the procuring activity

The information gained from this effort should be used to redesign the forging technique as necessary. Forging techniques should produce an internal grain-flow pattern parallel to the principal stresses, because mechanical properties are optimum in the direction of material flow during forging. The forging pattern should be free from reentrant and sharply folded flow lines.

6.6 Casting

Casting processes specified in GS designs shall be in accordance with a voluntary consensus standard approved by the M&P technical authority.

Casting processes and inspection should be in accordance with SAE AMS 2175.

6.7 Adhesive Bonding

Structural adhesive bonding shall be in accordance with a process approved by M&P for the specific application.

The following should be used as guidance for creating the process:

- *Structural adhesive bonding should be in accordance with MSFC-SPEC-445.*
- *Retesting adhesives used for production parts is not required if they are within the manufacturer's recommended shelf life.*
- *The documented process addresses prevention of contamination.*
- *The sensitivity of structural adhesive bonds to contamination is of particular concern. In the absence of relevant performance data, bond sensitivity studies should be conducted to verify that the required adhesive properties are maintained after exposure to the expected materials at the expected concentrations, including ozone, ambient humidity, cleaning fluids, and lubricants. Adequate cleanliness inspections should be conducted during the fabrication part of the bonding process.*
- *In testing, bonded primary structural joints should demonstrate cohesive failure modes in shear at ambient temperature.*
- *The corrosive effect of adhesives on other materials when exposed to conditions normally encountered in service is considered.*

6.8 Conventional Structures

6.8.1 Steel Conventional Structures

The design of conventional steel structures shall be in accordance with [AISC 325](#), Allowable Strength Design method or in accordance with 6.9.1, *Steel Nonconventional Structures*.

AISC Load and Resistance Factor Design, LRFD, is not compatible with GS design methods and load combinations. It is permissible to design conventional structures as nonconventional structures.

6.8.2 Aluminum Conventional Structures

The design of conventional aluminum structures shall be in accordance with the [Aluminum Design Manual \(ADM\)](#) or in accordance with 6.9.2, *Aluminum Nonconventional Structures*.

Nonconventional aluminum structures may be designed using provisions of the ADM, provided that the factors of safety are adjusted to be consistent with 6.9. It is permissible to design conventional structures as nonconventional structures.

6.8.3 Loads for Conventional Structures

- a. Structural design loads shall be specified in the design documentation.
- b. Wind loading for structural designs shall be in accordance with [ASCE-7](#) or a Program specified wind load document.
- c. Floor loading for access-controlled areas, workstands, and other specialized platforms shall be based on actual predicted loads in any credible arrangement at 100 lb/ft² load pressure.
- d. Flooring systems shall be designed or commercial flooring selected for a minimum load pressure of 100 lb/ft².
- e. When a concentrated load is specified, a load of 2000 lb shall be applied to 6.25 ft² (a 2.5 ft square).
- f. Floor loading for standard, building-type structures will be based on [ASCE-7](#).

The design should consider loads created by the assembly, lifting, handling, transportation, operations, wind conditions, launch-induced environments, and seismic events.

6.9 Nonconventional Structures (includes structural aspects of mechanisms)

- a. The following minimum factors of safety shall be used for structures and load-bearing components (excluding lifting devices, pressure vessels, preload in threaded fasteners, and springs) when not otherwise specified (see Table 2).
 - (1) GS structures and load-bearing components shall be designed to a minimum factor of safety of 2.0 against deformation or yielding that impairs the function of the part and a minimum factor of safety of 3.0 against collapsing, buckling, exceeding the ultimate load, or failing to support the design load.
 - (2) For brittle metals (less than 5% elongation-to-failure), the factor of safety shall be 5.0 against exceeding the UTS.
 - (3) For metal castings without an M&P-approved quality plan, the factor of safety shall be 10.0 against exceeding the UTS.
 - (4) For metal castings with an M&P-approved quality plan, the factor of safety shall be 5.0 against exceeding the UTS.
 - (5) For ductile matrix composite materials, the factor of safety shall be 5.0 against exceeding the UTS.
 - (6) For brittle matrix composites, the factor of safety shall be 10.0 against exceeding the UTS.
 - (7) For lifting provisions on GS, hoist rings, lifting lugs on GS structures, etc. the factor of safety shall be 5.0 against exceeding the UTS.

Lifting equipment (hoists, shackles, wire rope, cranes, etc.) is covered by NASA-STD-8719.9.

- b. Threaded fasteners shall meet the factors of safety contained in 6.9 (a) when only the operating load is considered. (This does not include preload, which is covered separately in 6.2.)

Required factors of safety are expressed with the appropriate number of significant figures/digits. For example, a calculated design factor of 2.98 would round to 3.0 for comparison with the minimum required factor of safety.

The required factor of safety for buckling is 3.0. It is good practice to increase the safety factor for Euler/Eigen buckling solutions to 5.0 due to the inherent unconservatism in that method.

Table 2. Summary Table of Factors of Safety

Material or application	FS on Yield Strength	FS on Ultimate Strength
Metal, ductile	2.0	3.0
Metal, brittle	N/A	5.0
Castings, without quality plan	N/A	10.0
Castings, with approved quality plan	N/A	5.0
Composite, ductile matrix	N/A	5.0
Composite, brittle matrix	N/A	10.0
Lifting lugs and hoist rings	N/A	5.0

6.9.1 Steel Nonconventional Structures

Nonconventional steel structures shall be designed in accordance with the factors of safety for nonconventional structures either by direct calculation or by using the AISC methods, substituting the factors of safety for nonconventional structures for the Code values.

6.9.2 Aluminum Nonconventional Structures

Nonconventional aluminum structures shall be designed in accordance with the factors of safety for nonconventional structures either by direct calculation or by using the Aluminum Association methods, substituting the factors of safety for nonconventional structures for the Code values.

6.9.3 Composite Nonconventional Structures

- a. For ductile-matrix composites with no material strength test data, the factor of safety shall be increased to 10.0 against exceeding the UTS.
- b. For ductile-matrix composites with material strength test data, the factor of safety shall be in accordance with section 6.9 (5.0 against exceeding the UTS).
- c. For brittle-matrix composites, the factor of safety shall be in accordance with section 6.9 (10.0 against exceeding the UTS).

6.9.4 Fasteners for Nonconventional Structures

- a. GS fasteners used in critical applications shall have lot traceability from the manufacturer to final installation.

Traceability applies to any single fastener if its failure will have catastrophic effects. Redundant fasteners do not require traceability even in a critical system. NASA-RP-1228 should be used for guidance in selecting and analyzing fasteners.

- b. Fasteners shall be selected from American Society of Mechanical Engineers (ASME) standards, National Aerospace Standards (NAS), Military Standards (MS standards), or other standards that define material, strength, testing, and coating requirements.
- c. Reusing self-locking fasteners shall be permitted when the running torque before clamp-up remains between the maximum self-locking torque and the minimum break-away torque.

Self-locking fasteners should be used wherever possible. The use of star lock washers, also known as toothed lock washers or serrated washers, should be avoided. These washers provide very little resistance to structural vibration and damage the surfaces they contact. Their application should be limited to lightweight electrical/electronic component mounting within racks and enclosures.

- d. Fasteners used in corrosive environments and applications where condensation can occur shall be installed using a corrosion-resistant sealant while the sealant is still wet (wet installation).
- e. When liquid-locking compounds are used for fastener installation, engineering drawings shall specify a validated process for application.

Liquid-locking compounds should be selected in accordance with ASTM D5363.

6.9.5 Loads for Nonconventional Structures

- a. The minimum dynamic amplification factor applied to a dynamic load shall be 2.0.

A load is only dynamic if its full application occurs faster than half the period of the first natural frequency of the structure. The dynamic amplification factor is a multiple of the static load to obtain an equivalent static load from a dynamic load when a true dynamic analysis is not performed. The factor of 2.0 equates to a suddenly applied load. Impact loads will be higher.

- b. Design loads shall be based on a conservative estimation of the maximum loading condition over the design life of the structure.

The traditional basis for "conservative" loads is a 2.5 standard deviation (sigma) chance of exceedance. The 2.5 sigma basis for structural loads has been used for GSE design for several programs, including the Shuttle Program. The exceedance for 2.5 sigma is approximately 1/285.

6.9.6 Springs

Springs shall be designed to a minimum factor of safety of 1.4 against exceeding the UTS.

Because of the nature of their design, springs do not meet the factors of safety specified for other engineering applications and should be designed in accordance with the Handbook of Spring Design from the Spring Manufacturers Institute.

6.10 Load Test

- a. A load test shall be performed on all structural GSE (access platforms, workstands, etc.) and moveable or articulating GS structures, except when one of the following conditions is met:
 - (1) the load test would create an unsafe condition,
 - (2) analysis shows that the load test will result in damage to the structure,
 - (3) critical welds have been volumetrically inspected and an independent analysis has been performed and approved by the Technical Authority, or
 - (4) one of multiple similar structures or mechanisms is load-tested, and the Technical Authority waives load testing of all the other similar structures or mechanisms.

Fixed GS structures may be load-tested using a representative section of the structure.

- b. GS, other than lifting equipment, shall be load tested to 125% of the design or working load, not including vehicle blast loads, hurricane wind loads, or other non-failure-critical loads when the structure/mechanism is in a nonoperational condition.
- c. Lifting devices and equipment will be load tested in accordance with [NASA-STD-8719.9](#).
- d. GS that have been load-tested shall be identified and marked in accordance with [KSC-STD-141](#), and in accordance with [KSC-STD-141](#) and [NASA-STD-8719.9](#) for lifting equipment.

NASA-STD-8719.9 contains requirements for both initial load testing (proof load) and periodic load testing for lifting equipment.

6.11 Fatigue and Design Life

Structures exposed to cyclic loads shall be designed for a minimum factor of safety of 4 against the design life, using 150% of the alternating stress.

The ratio of fatigue life to design life is 4 as a minimum. The designer/analyst has the responsibility to determine when cyclic loads are significant in the design. The relationship between stress/strength and fatigue life is highly nonlinear. Applying the factor of safety to life is the established engineering method to handle this nonlinearity. The structure is designed to withstand four times the number of load cycles expected during the design life. The factor of safety applied to life is sometimes called the Service Life Factor.

7. MECHANISM REQUIREMENTS

7.1 Mechanical Margins

- a. A static force/torque margin of 1.0 or greater shall be required to initiate motion.
- b. A static force/torque margin of 1.0 or greater shall be required for all holding/braking configurations.
- c. A dynamic force/torque margin of 0.25 or greater shall be required at all points of travel.

The force/torque margins address uncertainties in friction, damping, or other factors that could impede motion. Force/torque margin is equal to the available driving force/torque divided by the resisting torque, minus 1. A margin of 1.0 means that there is 200% of the required force to initiate motion.

7.2 Cranes, Hoists, and Other Lifting Devices

The design and certification of lifting devices (cranes, crane girders, hoists, lifting slings, jacks, etc.) shall be in accordance with [NASA-STD-8719.9](#).

7.3 Transportation Equipment

Moving/rolling GS shall have a stability analysis performed using either 0.2 g acceleration or a sudden stop at the maximum operational speed, with the wheels, slides, skids, etc., in the least advantageous position for the purpose of the analysis.

7.4 Umbilical Design

Reusable umbilicals shall be designed in accordance with [KSC-GP-986](#).

7.5 Bearings

Journal (sleeve) bearings and rolling-element bearings shall be selected and used in accordance with the manufacturers' rated load limits without the application of additional safety factors.

7.6 Tethering Provisions

GS and GS components used near flight hardware or above personnel or flight hardware that require temporary removal/installation during operations, such as quick-release pins and quick-disconnect caps, shall be tethered to (or otherwise held captive) by the equipment for which they are used.

Quick-release pins and pin tethers should be in accordance with [KSC-STD-P-0006](#).

7.7 Redundancy in Mechanisms

Mechanisms shall not be considered redundant if the failure of either the primary or secondary would be undetectable before its critical operation is required.

A single-point failure mode within a redundant device of a system is typically not a single-point failure mode of that system. If it is, the devices are not completely redundant. Where two or more mechanisms are used to execute a single critical function, the deployment/operation of one must be independent of the successful deployment/operation of the other. A mechanically redundant device should be provided such that its failure could not prevent successful deployment of the other device.

8. FLUID SYSTEM REQUIREMENTS

- a. All pressurized systems will comply with [NASA-STD-8719.17](#).

All NASA designs are required to comply with [NASA-STD-8719.17](#), which encompasses many of the specific requirements contained in this standards manual. This standards manual and the standards cited herein are intended to provide additional requirements.

- b. The design of pressure systems, including pressure vessels, transmission lines, and GS, will comply with [KNPR 8715.3-1](#), Chapter 7, which complies with [NASA-STD-8719.17](#).

8.1 Fluid System Cleanliness

- a. Surface cleanliness of fluid systems shall be in accordance with [ASTM G93](#).

The following standards are considered functionally equivalent to [ASTM G93](#): KSC-C-123, IEST-ST-CC1246, ISO 14952, JPR 5322.1, MSFC-SPEC-164, and SAE ARP 1176. Other precision-cleaning standards may be used with approval from an M&P engineer approved by NASA.

- b. The cleanliness level and test method shall be specified in the design documentation.
- c. For GS interfaces with precision-cleaned fluid systems for flight, the supply interface/final filters shall be located as close to the flight hardware interface as possible.
- d. Interface filters shall be used on outlet lines if it is determined that any operations, such as the servicing or deservicing of fluids, could permit flow in a reverse direction.
- e. Interfacing fluid system GS shall be cleaned to meet or exceed the cleanliness level of the flight hardware.
- f. Protective covers shall be provided for all hoses, ports, fittings, and other fluid-fitting connections to GS to protect the threads and sealing surface and maintain the cleanliness of the system.

Use caution in selecting caps and plugs as covers because of the potential for generating debris during installation or removal, especially in oxygen systems. When possible, the protective cover

should be connected with a lanyard or the equipment should have a designated storage provision.

8.2 Fluid Compatibility

For the purposes of this standards manual, the definition of “hazardous fluids” includes GO₂, LO₂, fuels, oxidizers, and other fluids that could cause corrosion, chemically or physically degrade materials in the system, or cause an exothermic reaction.

8.2.1 Hazardous Fluids Other than Oxygen

- a. Materials exposed to hazardous fluids other than oxygen shall be evaluated or tested for compatibility.

NASA-STD-6001, Test 15, tests materials for short-term exposure to fuels and oxidizers.

NASA-STD-6001, Test A.7, tests materials for incidental exposure, such as a splash, to fuels and oxidizers. For many materials, material compatibility ratings and test results based on NASA-STD-6001, Test 15, are available in the MAPTIS database.

- b. Appropriate compatibility tests shall be conducted for materials that are subjected to long-term exposure to fuels, oxidizers, or other hazardous fluids. The test conditions are customer-specified and shall simulate the worst-case use environment that would intensify reactions or degradation of the material or fluid.
- c. Material degradation in long-term tests shall be characterized by posttest analyses of the material and fluid to determine the extent of changes in chemical and physical characteristics, including mechanical properties.

8.2.2 Oxygen Systems

- a. LO₂ and GO₂ systems shall use materials that are nonflammable in their worst-case use configuration, as defined by [NASA-STD-6001](#), Test 17, for upward flammability in GO₂, or Test 1 for materials used in oxygen pressures that are less than 350 kPa (50 psia).

Material flammability ratings and test results based on [NASA-STD-6001](#) are available in the MAPTIS database for many materials. KTI-5210 may be consulted for a summary of oxygen compatibility test results for various materials used in LO₂ and GO₂ applications.

- b. When a material in an oxygen system is determined to be flammable by Test 17, an oxygen compatibility assessment shall be conducted in accordance with [NASA-STD-6001](#) and the system safety rationale documented and approved by the M&P organization.

The results of the oxygen compatibility assessment may require configurational testing.

- c. When the oxygen compatibility assessment shows that the risk is above an acceptable level, configurational testing shall be conducted to support the oxygen compatibility assessment.

- d. Configurational testing shall exercise the ignition mechanisms identified by the oxygen compatibility assessment, using test methods described in [ASTM MNL 36](#).
- e. The configurational test method and acceptance criteria shall be reviewed and approved by the M&P organization.
- f. The as-built configuration shall be verified against the oxygen compatibility assessment to ensure that mitigation methods identified in the report were incorporated into the design and construction of the hardware.
- g. For compressed-air systems and oxygen-enriched systems, the need for an oxygen compatibility assessment shall be addressed on a case-by-case basis.

Compressed-air systems and oxygen-enriched systems are inherently less hazardous than systems containing pure oxygen; the hazard increases with oxygen concentration and pressure.

Guidelines on the design of safe oxygen systems are contained in [ASTM MNL 36](#), [ASTM G88](#), [ASTM G63](#), [ASTM G94](#), and [NASA/TM-2007-213740](#).

- h. Oxygen, oxygen-enriched, and compressed-air system components that operate at pressures above 1.83 MPa (265 psia) shall undergo verification or validation testing at maximum design pressure for a minimum of 10 cycles before being placed into service.

This testing is normally performed as part of verification testing. Retesting is required if the results are invalidated by actions occurring after the test (such as rework, repair, or interfacing with hardware for which the cleanliness level is unknown or uncontrolled). For critical systems and systems directly interfacing with flight hardware, the acceptance testing should be performed for 10 cycles.

- i. Parts machined from polychlorotrifluoroethylene (PCTFE) shall comply with [ASTM D7194](#), Type I, when used in oxygen-enriched systems or compressed-air systems over 3000 psia.

[ASTM D7194](#) requires an annealing process for parts machined from PCTFE. Annealing results in dimensional stability, which minimizes the occurrence of flow friction in oxygen system components with PCTFE soft goods. PCTFE used in inert fluid systems does not require annealing. PCTFE, which is not directly in the oxygen flow stream (e.g., secondary seals), do not require annealing. Approval for the use of PCTFE in oxygen-enriched systems without annealing requires approval by an M&P engineer approved by NASA.

8.3 Oxygen System Cleanliness

Liquid oxygen, gaseous oxygen, and oxygen enriched systems shall be cleaned to level 300A or cleaner in accordance with [ASTM G93](#).

The following standards are considered functionally equivalent to [ASTM G93](#): [KSC-C-123](#), [IEST-ST-CC1246](#), [ISO 14952](#), [JPR 5322.1](#), [MSFC-SPEC-164](#), and [SAE ARP 1176](#). Other precision-cleaning standards may be used with approval from an M&P engineer approved by NASA.

8.4 Fluid System Margins

Design margins for fluid systems should be listed in analysis documents. Typical margins on flow rate requirements are 150% (an additional design margin of 50%) at concept design review and 125% at the final design review. Margins for heat transfer should be based on temperature difference (delta T). Margins in cryogenic systems may be expressed in amount of subcooling (for zero quality) or in additional vapor phase for non-zero quality.

8.5 Pressure Vessels and Pressurized Systems (PVS)

8.5.1 Stationary Pressure Vessels

- a. Metallic pressure vessels for use in GS shall be designed, constructed, tested, and stamped in accordance with [ASME BPVC-VIII](#), Division 1, 2, or 3.
- b. Custom-designed and fabricated metallic pressure vessels using unlisted materials as defined by [ASME BPVC-VIII](#) shall have a minimum factor of safety against burst of 4.

Shops and welders repairing or altering code vessels require R-stamp certification. Noncode PVS should be altered or repaired in accordance with the requirements of the most applicable national consensus standard.

- c. Composite Overwrapped Pressure Vessels (COPVs) for use in GS shall be designed, constructed, tested, and marked in accordance with [ASME BPVC-X](#).

COPVs should be used only when necessary because of weight constraints. Special training and certification are required for personnel handling or repairing COPVs. Damage to COPVs can be difficult to detect because reliable NDE methods have not been developed. COPV failure modes can be catastrophic, requiring special safety clears during pressurization.

- d. All ASME code-stamped vessels shall be registered with the National Board of Boiler and Pressure Vessel Inspectors.

8.5.2 Mobile Pressure Vessels

- a. Compressed-gas cylinders shall be labeled in accordance with [CGA C-7](#).
- b. Pressure vessels used for transporting hazardous commodities will meet the Department of Transportation's requirements in [49 CFR 171 through 180](#) or ASME BPVC, Section XII, Rules for Construction and Continued Service of Transport Tanks.

8.5.3 Internationally Sourced Pressure Vessels

- a. Pressure vessels obtained from international sources shall meet the requirements of [EU 97/23/EC](#).
- b. Internationally sourced vessels shall be used at pressures below one-fourth the manufacturer's stated or measured burst pressure (4:1 on burst).

- c. Internationally sourced vessels containing brittle materials in the pressure boundary shall be used at pressures below one-tenth the manufacturer's stated or measured burst pressure (10:1 on burst).

8.6 Design of Piping Systems

- a. Piping and support systems in remote or cross-country areas or where personnel traffic is low shall be in accordance with [ASME B31.8](#).
- b. Piping and support systems for refrigeration or heat transfer systems shall be in accordance with [ASME B31.5](#).
- c. All other piping and support systems shall be in accordance with [ASME B31.3](#).
- d. GSE piping/tubing welds shall have 100% inspection in accordance with ASME standards, using radiography or ultrasound.
- e. GSS piping/tubing welds shall have 5% random inspection in accordance with ASME standards, using radiography or ultrasound.
- f. All welds in Category M fluid service systems shall have 100% inspection in accordance with ASME standards, using radiography.
- g. When less than 100% inspection is performed, the allowable stress of welded pipe, tubing, fittings, and joints shall be 80% of the material allowable stress (one-third of ultimate strength or two-thirds of yield strength at temperature).
- h. The completed system shall be pressure-tested hydrostatically at 150% of the maximum allowable working pressure (MAWP) or pneumatically tested to 110% of MAWP, or shall be subjected to the sensitive leak test in accordance with ASME B31.3.

Examples include piping between facilities in low-traffic areas, buried pipelines, and long-run piping between remote facilities. Where [ASME B31.3](#) piping connects to [ASME B31.8](#) piping (e.g., at facility interfaces), the design should consider the differences in internal diameters and how the piping will be cleaned (via pipeline cleaning pigs). [ASME B31.1](#) meets or exceeds the requirements of [ASME B31.3](#) and may be used as an alternative.

8.6.1 Unlisted Piping Components

Piping, tubing, and fittings shall be considered compliant with [ASME B31.3](#), Section 304.7.2, if they meet **all** of the following requirements:

- (1) Stress under the maximum pressure does not exceed one-third of the minimum tensile strength in the design temperature range.
- (2) Stress under the maximum pressure does not exceed two-thirds of the minimum yield strength in the design temperature range.
- (3) The material is ductile.

8.6.2 Identification, Color-Coding, and Labeling

- a. Ground piping systems shall be identified and color-coded in accordance with [MIL-STD-101](#).
- b. Working pressures on all piping systems exceeding 60 psig shall be identified adjacent to the commodity in the same letter size.
- c. Where conventional markings are likely to be damaged by extreme temperatures or hidden by a covering of frost, a stainless-steel identification tag shall be securely fastened at the same locations given for color bands in MIL-STD-101.
- d. Each panel-mounted component shall be identified on the face of the panel adjacent to the component (beneath the component if practicable).

Color bands may be made of pressure-sensitive tape (only if recommended by the manufacturer for specified temperature range) or painted on, and should be applied no less than 40 ft apart on straight pipe runs inside buildings and 500 ft apart on straight cross-country runs.

Fire protection and related potable-water piping systems could be pressurized at varying ranges, and additional labeling is not considered justified. Steam, flammable gases, and other hazardous materials should be labeled at all pressures.

The component identification should include the component's name, find number, media, and pressure. The media and pressure may be listed on the panel face. The purpose of each panel should be identified on the face of the panel.

8.6.3 Welding

- a. Welding process and weld acceptance criteria for pressurized piping and tubing shall be in accordance with [ASME B31.3](#).
- b. All welds on tubing shall be cleaned and passivated in accordance with [ASTM A967](#).

Note that ASTM A967 requires ASTM A380 for cleaning and descaling.

- c. Welds in tubing systems shall be installed, tested, and rated in accordance with [KSC-SPEC-Z-0008](#).

Welds performed on superaustenitic stainless-steel tubing exposed to a corrosive environment should use fittings, consumable weld inserts, or weld filler material of Inconel 625 or Hastelloy C-22 (UNS N60625 or N06022).

- d. Welds in pneumatic systems shall be subjected to 100% radiographic testing in accordance with [ASME B31.3](#) for normal fluid service.

Meeting the AWS D17.1 requirement for in process examination of automatic gas tungsten arc welding may be substituted for the required 100% radiographic testing.

8.6.4 Flexible (Flex) Hoses

Designs using convoluted, unlined bellows or flexible metal hoses should include analysis in accordance with JSC 08123 to preclude premature failure due to flow-induced vibration. Acoustic coupling that can intensify the stresses caused by flow-induced vibration should be avoided by ensuring that normal fluid flow requirements do not exceed a velocity of Mach 0.2.

- a. Flex hoses shall be used below one-fourth of the manufacturer's specified burst pressure.

The increased burst pressure factor of safety for flex hoses above what is required for process piping (4.0 vs. 3.0) is based on the ASME knockdown factor for weld inspection because the welds cannot be properly inspected after forming convolutes. Also, the in-service condition of a flexible hose (including convoluted, polymeric braided, or elastomeric hoses) is more difficult to assess than pipe, tubing, or components.

- b. In-service inspection of flex hoses shall be in accordance with [SAE ARP 1658](#).
- c. Convoluted metal flex hoses without a history of successful use at KSC or at a NASA facility shall have a minimum of 20% longitudinal weld inspection in accordance with [ASME B31.3](#), Appendix X inspection criteria.

Several manufacturers and hose designs covered by component specification control drawings have extensive service history and are considered acceptable for use without additional weld inspection.

8.6.5 Pipe Specifications

- a. Stainless-steel pipe for fluid systems shall be in accordance with [ASTM A312](#).
- b. Pipe fittings shall conform to [ASME B16 standards](#), [KSC-GP-425](#), or [SAE J518](#).
- c. Expansion joints used in fluid systems in marine or launch-induced environments shall be made from UNS N06022 (Hastelloy C22) material.

8.6.6 Tubing Specifications

- a. Austenitic stainless-steel tubing shall be UNS S30400 or S31600 in accordance with [ASTM A269](#).
- b. Austenitic stainless-steel tubing shall have a wall thickness tolerance of $-0/+10\%$.
- c. Austenitic stainless-steel tubing shall be tested for intergranular corrosion in accordance with [ASTM A269](#), supplementary requirement S4.

KSC-SPEC-Z-0007 covers the procurement of type 304 and 316 stainless-steel tubing with the required wall thickness tolerance. The reduced tolerance on tubing wall thickness is necessary to match the pressure ratings of 37-degree for flared-tube fittings.

- d. When directly exposed to a corrosive environment, tubing shall consist of UNS N08367 or S31245 superaustenitic stainless steel (trade name AL6XN or 254SMO) in accordance with [ASTM A249](#) or [ASTM A269](#) or shall consist of UNS S31600/S31603 (316/316L) dual-certified stainless steel in accordance with [ASTM A269](#) with wall thickness tolerance of $-0/+10\%$.
- e. Austenitic stainless-steel tubing shall be marked with “A269,” the specific alloy (304 or 316), and the required wall thickness tolerance ($-0/+10\%$).

KSC-SPEC-P-0027 covers the procurement of seam-welded AL6XN tubing similar to [ASTM A249](#). Low-carbon (316L) tubing is preferred for welded applications whereas the standard carbon 316 tubing has higher mechanical strength. Dual-certified tubing provides the mechanical strength of 316 with the welding/corrosion advantage of 316L.

8.6.7 Tubing Fabrication and Installation

- a. Tubing shall be fabricated, tested, and installed in accordance with [KSC-SPEC-Z-0008](#).
- b. Tube welds shall be inspected in accordance with [ASME B31.3](#).

Welds performed on superaustenitic stainless-steel tubing should use fittings, consumable weld inserts, or weld filler material of Inconel 625 or Hastelloy C 22 (UNS N60625 or N06022) in applications where the full corrosion resistance of superaustenitic stainless steel is required.

8.6.8 Fluid Fittings

Flared-tubing fittings, tube weld fittings, and pipe fittings shall be selected in accordance with [KSC-GP-425](#) (or equivalent SAE AS fittings) unless approval is obtained from the Technical Authority for a specific application.

[KSC-GP-425](#) fittings are preferred for all fluid systems for improved standardization, compliance with PVS codes, ease of maintenance, and superior sealing qualities. AN fittings, other 37-degree flared-tube fittings, or alternative industry standard fittings may be approved for a specific application by the Technical Authority.

8.6.9 Unlisted Components

Components other than pressure relief devices shall be considered compliant with [ASME B31.3](#), Section 304.7.2, if they meet **all** of the following requirements:

“Successful history” is NASA or NASA contractor experience without structural failures for the service life of a fluid system or the length of the program supported by the system. Alternatively, “successful history” is successful experience used in support of NASA programs by commercial entities.

- The component is COTS manufactured by a manufacturer selected from those with successful history of providing the identical or similar components to KSC, NASA, or NASA contractors

- The component has a 3:1 ratio of manufacturer's rated burst pressure to system design pressure (MAWP). If the component is rated for a burst pressure ratio less than 3, the component is derated to a new design pressure of one-third of the manufacturer's burst pressure rating. Brittle materials or cast iron covered by [ASME BPVC-VIII](#), Division 1, Part UCI, require a factor of 10:1 against rated burst pressure.
- The pressure boundary of the component is made from materials listed in [ASME B31.3](#) or [ASME BPVC-II](#).
- The component is used only under conditions of pressure, temperature, humidity, vibration, etc., that meet the manufacturer's ratings or that have been tested by KSC, NASA, or a NASA contractor for the same or similarly proportioned components of the same or like material.
- Flexible hoses are used below one-fourth of the manufacturer's rated burst pressure.

8.6.10 Unlisted Components Other Than COTS

Components that do not satisfy 8.5.9 or components that are custom designed shall meet **all** of the following requirements:

- The component has a minimum 4:1 ratio of burst pressure to design pressure (MAWP).
- Brittle materials or cast iron covered by [ASME BPVC-VIII](#), Division 1, Part UCI, have a minimum 10:1 ratio of burst pressure to design pressure.
- The pressure boundary of the component is made from materials listed in [ASME B31.3](#) or [ASME BPVC-II](#).
- The component has either a design analysis package or a test report to document the minimum burst pressure requirement.

8.6.11 Pressure Relief Devices

- a. Pressure relief devices for piping systems shall meet [ASME B31.3](#).
- b. Pressure relief devices for stationary pressure vessels shall meet [ASME BPVC-VIII](#), Division 1, including the requirement for the ASME UV or UD stamp.
- c. Pressure relief devices for mobile pressure vessels shall meet Department of Transportation (DOT, [49 CFR](#)) requirements.
- d. The opening through all pipe, fittings, and components between a pressure source (vessel, regulator, etc.) and its pressure relief valve shall have at least the area of the pressure relief valve inlet.
- e. Pressure relief devices shall be designed for the effects of a fire if any of the following apply:
 - The vessel contains flammable materials or oxidizer (N_2O_4 , O_2 , NO_2 , etc.).
 - Flammable materials are stored within 10 ft of the PVS

- Pressurized flammable fluids stored **below** 15 psig are stored within 50 ft of the PVS.
 - Pressurized flammable fluids stored **above** 15 psig are stored within 100 ft of the PVS.
 - The vessel is within a building constructed with or containing flammable materials (e.g., partition walls or carpeting).
- f. Relief valves shall be purchased clean to the requirements of 8.2 and factory-set to the required system relief pressure.
- g. Changes to the set pressure of the relief valves shall be performed only by the manufacturer or an ASME VR-certified vendor.
- h. For existing or heritage systems used as GS, pressure relief devices shall be in full compliance with [ASME B31.3](#) or [ASME BPVC-VIII](#), before the system is placed in service.

8.6.12 Qualification of Components by Pressure Test

Components shall be considered compliant with [ASME B31.3](#), Section 304.7.2, if they meet either of the following conditions:

- a. The component is rated at one-fourth of the test pressure if the materials of manufacture are known and are ductile (over 5% elongation at failure).
- b. The component is rated at one-tenth of the test pressure if the materials of manufacture are unknown or are brittle (less than 5% elongation at failure).

8.7 Vacuum and Compressed-Air Systems

- a. Vacuum systems shall be designed in accordance with the allowable stresses in [ASME B31.3](#).
- b. Vacuum vessels not covered by a separate requirement shall be designed with the safety factors in 6.9.
- c. Compressed-air systems having an operating gage pressure up to 1.0 MPa (150 psi) shall be designed in accordance with a national consensus standard such as one from ASME or the Compressed Gas Association (CGA).
- d. Compressed-air systems above 1.0 MPa (150 psi) shall be designed in accordance with [ASME B31.3](#) and [KSC-STD-Z-0005](#).

[ASME B31.1](#) meets or exceeds the requirements of [ASME B31.3](#) and may be used as an alternative.

- e. Compressed-air systems shall be cleaned to a level of Generally Clean or the precision cleaning requirements of 8.1.

Generally Clean is defined in ISO 14952, KSC-C-123, and other cleaning standards.

8.8 Breathing Air

- a. Breathing-air respirator systems shall conform to [29 CFR 1910](#).
- b. Breathing-air storage and distribution systems shall be designed in accordance with [KSC-STD-Z-0008](#).
- c. The design of GS used for life support systems shall be in accordance with [KSC-STD-Z-0008](#).

GS intended for use by operators wearing PHEs should be designed to meet the following criteria:

- *Items (valves, gages, levers, bolts, nuts, and any other items required to be moved, turned, manipulated, or monitored) should be located in a position that will make it easier for a PHE-suited operator to access the item while standing.*
- *Sufficient clearance should be provided to preclude the operator from brushing against other surfaces.*
- *GS should be designed to avoid requirements for PHE-suited operators to reach into tight areas; stoop to avoid low overhead obstructions; mount supplementary ladders or stairs; touch rough surfaces; or sit, kneel, or lie on the floors or decks.*
- *The design should include suitable provisions to prevent discomfort or fatigue for the PHE-suited personnel.*
- *Use of expanded metal surfaces and other sharp edges should be avoided.*

8.9 Pneumatics

- a. The design of pneumatic GS shall be in accordance with [KSC-STD-Z-0005](#).
- b. Pneumatic cylinders and actuators shall be designed to meet a national consensus standard approved by the Technical Authority or to have a minimum factor of safety of 4 against burst.

Media includes but is not limited to nitrogen, helium, hydrogen, oxygen, methane, breathing air, and special mixtures of these gases.

8.10 Hydraulics

8.10.1 Hydraulic Design

The design of GS hydraulic systems over 150 psig shall be in accordance with [ASME B31.3](#) or [NFPA T2.6.1](#), and with [KSC-STD-Z-0005](#).

8.10.2 Hydraulic Components and Assemblies

COTS hydraulic systems, subsystems, assemblies, or components shall meet one of the following:

- a. [ASME B31.3](#), [NFPA T2.6.1](#), [ISO/TR 10771-2](#), or another national consensus standard approved by the Technical Authority.
- b. Components without certification to a specific design standard may be used at a pressure less than one-fourth of the manufacturer's rated burst pressure or one-fourth of the pressure obtained from a pressure test conducted in accordance with [ASME B31.3](#), Section 304.7.2.

8.10.3 Hydraulic Cylinders and Actuators

Hydraulic cylinders and actuators shall be designed to meet a national consensus standard approved by the Technical Authority or to have a minimum factor of safety of 4 against burst.

8.10.4 Hydraulic Accumulators, Vessels, and Reservoirs

- a. Hydraulic accumulators charged with a pneumatic pressure shall meet [ASME BPVC-VIII](#), Division 1 or 2.
- b. Hydraulic storage vessels shall meet [API 620](#) or ASME BPVC.
- c. Unpressurized hydraulic reservoirs shall meet the structural requirements of this standards manual or [API 620](#) or ASME BPVC.

8.10.5 Hydraulic System Cleaning

Hydraulic systems shall be cleaned in accordance with [ASTM D4174](#) or the precision cleaning requirements of 8.2.

ISO 23309 is an acceptable alternative to [ASTM D4174](#).

8.10.6 COTS Hydraulic Systems

Prepackaged hydraulic power systems and oil lubrication systems from reputable manufacturers shall be considered COTS if the following conditions are met:

- the systems are used within manufacturer's rated capacity,
- the systems are protected against overpressure, and
- the systems are maintained in accordance with the manufacturer's instructions.

8.10.7 Oil Lubrication and Grease Lubrication Systems

- a. Oil lubrication systems that operate under 150 psig and all grease lubrication systems shall be designed to the appropriate national consensus standard.
- b. Overpressure protection shall be provided for oil and grease lubrication systems utilizing positive displacement pumps.

8.11 Hydrocarbon Fuel

The design of GS used for servicing with hydrocarbon fuels (JP-4, JP-5, RP-1, and ASTM jet fuels A and B) shall be in accordance with [ASME B31.3](#).

[ASME B31.1](#) meets or exceeds the requirements of [ASME B31.3](#) and may be used as an alternative.

8.12 Environmental Control Systems

- a. GSE used for an Environmental Control System (ECS) shall be in accordance with the [ASHRAE Handbook—Fundamentals](#) (Code and Standards), Chapter 39.

Components purchased to standards of the Air-Conditioning, Heating, and Refrigeration Institute may be used as an alternative.

- b. Gaseous nitrogen shall be isolated from the ECS air ducting system by using two valves in series in the gaseous nitrogen supply line and venting to exterior atmosphere between the valves.
- c. If the gaseous nitrogen supply is connected to the ECS duct system, ECS shall include the capability of monitoring the oxygen content in the ducting or in the room serviced by the ECS.
- d. The design of ducting exposed to the launch-induced environment shall be in accordance with [ASME B31.3](#) or with the structural requirements in 6.9.
- e. The design of ducting not exposed to the launch-induced environment shall be in accordance with applicable SMACNA ducting standards, [ASME B31.3](#), or with the structural requirements in 6.9.

Intakes to air distribution systems should be located away from areas where toxic vapors are normally vented or where accidental spillage could contaminate breathing-air supplies or vehicle air supplies. Intakes should protect equipment from the accumulation of toxic vapors. Prefilters should be used in fresh-air intakes and be located upstream of primary filters to prevent excessive loading of the primary filter. Filters should be located immediately upstream of all interfaces where control of particulate matter is required for system performance.

8.13 Cryogenic Systems

- a. The design of GS used for cryogenic servicing with liquid hydrogen, liquid oxygen, and liquid nitrogen shall be in accordance with [KSC-STD-Z-0009](#).
- b. The design of GS used for cryogenic servicing with liquid methane shall be in accordance with [NFPA 59A](#).

The design of GS used for cryogenic servicing with liquid helium and cryogenic fluids should use [KSC-STD-Z-0009](#) as a guide.

8.14 Hypergolic Fluid Systems

Hypergolic propellants are fuels and oxidizers or fuels and catalysts that, when combined, produce a violent, explosive, high-energy, exothermic reaction, without any other ignition source. Hypergolic propellants are highly toxic, are very sensitive to material selection for containment or sealing, and require the use of personal protective equipment (PPE) for GS operators.

- a. The design of GS used for hypergolic-fuel or oxidizer servicing with monomethylhydrazine (MMH), unsymmetrical dimethylhydrazine (UDMH), nitrogen tetroxide (N₂O₄), aerosine 50 (A-50), or hydrazine (N₂H₄) shall be in accordance with [KSC-STD-Z-0006](#).
- b. Fluid fittings in hypergolic-fuel systems that are intended to be connected or disconnected as a part of normal operations (not maintenance or testing) shall use only left-hand threads. Alternative: 5/8" or 1/3/4" fittings in accordance with [KSC-GP-425](#).
- c. Fluid fittings in hypergolic oxidizer systems that are intended to be connected or disconnected as a part of normal operations (not maintenance or testing) shall use only right-hand threads. Alternative: 5/8" or 1/3/4" fittings in accordance with [KSC-GP-425](#).
- d. Hypergolic fluid systems shall be designed in accordance with [ASME B31.3](#) as Category M toxic fluid service.
- e. Leak testing shall utilize the sensitive leak test method from [ASME B31.3](#) performed at the system maximum expected operating pressure (MEOP).

ASME B31.3 specifies that the leak test be performed at the lower of 25% of MEOP or 15 psi. Performing the leak test at MEOP will increase the sensitivity for leak detection.

- f. Pipe threads (NPT or other tapered pipe threads) shall not be used except for conversion fittings from pipe-thread components to straight thread.

Components using pipe should not be selected. The connections from pipe thread to straight thread should occur as close as possible to the pipe-thread component.

8.15 Ammonia

- a. Ammonia systems shall be designed in accordance with [ASME B31.3](#) as Category M toxic fluid service.
- b. Leak testing shall employ the sensitive leak test method from [ASME B31.3](#) performed at the system MEOP.

[ASME B31.3](#) specifies that the leak test be performed at the lower of 25% of MEOP or 15 psi. Performing the leak test at MEOP will increase the sensitivity for leak detection.

8.16 Refrigeration Systems

Refrigeration systems using nontoxic fluids below 500 psi (3.45 MPa) built from commercially available components shall be in accordance with [ASHRAE](#), [UL 207](#), or ASME B31 standards.

COTS refrigeration systems and facility HVAC systems are not covered by this standards manual.

9. ELECTRICAL AND ELECTRONICS REQUIREMENTS

Electrical and electronic equipment should be capable of a minimum of 10% expansion or modification without major redesign.

9.1 Electrical Design for Pneumatic and Hydraulic Components

The electrical design for pneumatic and hydraulic components shall be in accordance with [KSC-STD-E-0004](#).

9.2 Electrical Power Systems

The design of electrical power systems covered by [NFPA 70](#) shall be in accordance with [NFPA 70](#) and [NFPA 70E](#).

Incorporating batteries in the design of GS should follow the recommended practices in the following documents: IEEE 484; IEEE 1106; IEEE 1187; IEEE 446; ANSI C18.2M, Part 1; and ANSI C18.3M, Part 1.

9.2.1 EGSE Power

Electrical GSE (EGSE) shall operate from the following nominal alternating-current (AC) and direct-current (DC) voltages as applicable:

AC voltages:

- a. 120/240 volts (V) root mean square (rms), 60 Hz
- b. 120/208 V rms, 60 Hz
- c. 240/480 V rms, 60 Hz
- d. 277/480 V rms, 60 Hz

400 Hz power may be specified in GS design with prior approval from the responsible Technical Authority.

DC voltages:

- a. 28 V
- b. 56 V
- c. 120V

9.2.2 Emergency Power

When loss of power will cause hazardous conditions, those power systems shall be backed up by batteries connected in a manner that ensures uninterrupted power for safing of GSE systems.

9.3 Bonding, Grounding, Shielding, and Protection from Electromagnetic Interference, Lightning, and Transient Voltages

- a. GS shall be bonded, grounded, shielded, and protected from electromagnetic interference, lightning, and transient voltages in accordance with [KSC-STD-E-0022](#) and [NFPA 70](#).
- b. GS that directly interface with flight hardware which provide bonding, grounding, or shielding to the flight hardware shall be in accordance with NASA-STD-4003.

[KSC-STD-E-0022](#) works in conjunction with [KSC-STD-E-0012](#), which provides requirements for facility grounding, bonding, and lightning designs. For additional information on lightning protection, refer to IEC 62305, Parts 1 through 4. EMC requirements applies to COTS equipment utilized in GS. The NASA Technical Authority for electrical and electronic design has the authority to approve tailored tests plans, requirements and specific test parameters to meet the requirements of [KSC-STD-E-0022](#).

9.4 Hazardproofing

The design of electronic equipment and wiring for all voltages in hazardous locations shall be in accordance with [NFPA 70, Article 500](#), and with [KSC-STD-E-0002](#).

9.5 Electrical, Electronic, and Electromechanical Parts

- a. Electrical, electronic, and electromechanical (EEE) parts shall be in accordance with [KSC-PLN-5406](#).
- b. Derating of EEE parts shall be in accordance with KSC-PLN-5406 and NFPA 70.

[KSC-PLN-5406](#) addresses EEE part selection, derating, obsolescence, screening, procurement, counterfeit prevention, etc. See [NASA-HDBK-4008](#) for design and development guidance of programmable logic devices.

9.6 ESD-Sensitive Components and Assemblies

ESD practices and processes shall be in accordance with [ESD S20.20](#).

[MIL-STD-1686](#) and [MIL-HDBK-263](#) should be used as guidance.

Insulator materials should not be used near ESD-sensitive components or assemblies.

9.7 Electrical Power Receptacles and Plugs

- a. AC electrical power receptacles and plugs that supply power to GS shall be in accordance with [KSC-STD-E-0011](#).
- b. Electrical power receptacles and plugs within GS shall be in accordance with [KSC-GP-864](#).

9.8 Cable, Wiring, and Harnesses

- a. Power cables shall be in accordance with [NFPA 70](#).
- b. Electrical hookup wire shall be in accordance with [SAE AS 50861](#), [MIL-DTL-16878](#), or [SAE AS 22759](#) or NEMA HP 7.
- c. Flexible, multiconductor, jacketed electrical cable, and cable harnesses shall be designed and fabricated in accordance with [KSC-GP-864](#).
- d. Crimping shall be in accordance with [NASA-STD-8739.4](#) or IPC/WHMA-A-620 and [IPC/WHMA-A-620-S](#).
- e. Electrical-wire insulation materials shall be evaluated for flammability in accordance with [NASA-STD-6001](#), Test 4.
- f. Arc tracking shall be evaluated in accordance with [NASA-STD-6001](#), Test 18.
- g. Kapton insulation shall not be used in GS wiring.

Arc tracking testing is not required for chlorinated polyethylene (CPE), polytetrafluoroethylene (PTFE), PTFE laminate, ethylene tetrafluoroethylene (ETFE), or silicone-insulated wires because the resistance of these materials to arc tracking has already been established. Arc tracking testing is intended for other insulation materials, such as polyimide, which has a service history of arc tracking problems.

- h. Electrical cable and harness assemblies shall be identified at each end of the cable or harness and labeled to show the assembly part number, cable or harness reference designation number, and cable or harness end marking in accordance with the requirements provided on the cable assembly drawing and described in [120E3100003](#).
- i. Cable assemblies and wire harnesses shall be marked in accordance with [KSC-E-166](#).
- j. Labels shall meet the requirements of [KSC-STD-E-0015](#).
- k. Heat-shrinkable sleeving labels shall conform to the requirements of [SAE AMS-DTL-23053/5](#), Class 1.

Heat shrinkable flexible polyolefin sleeving is used for light duty harness jackets, individual conductors, wire color coding marking or identification.

- l. The heat-shrink labels shall be marked in accordance with [SAE AS 5942](#) and shall meet the testing requirements of [MIL-STD-202](#), Method 215.

MIL-DTL-23053/5 was replaced by [SAE AMS-DTL-23053/5](#). MIL-M-81531 was replaced by [SAE AS 5942](#).

9.9 Glands and Cable Termination Fittings

Glands and fittings shall be selected based on cable type, environmental conditions, electromagnetic interference (EMI) / electromagnetic compatibility (EMC) requirements, and material compatibility. Glands and fittings shall be installed in accordance with the manufacturer's specifications.

Glands and cable termination fittings are an acceptable alternative to typical connector terminations. Glands and cable termination fittings provide a means for passing armored, metal-clad and jacketed cable through a bulkhead or enclosure.

9.10 Soldering

- a. Soldering of electrical connections shall be in accordance [IPC J-STD-001](#).
- b. Soldering of critical electrical connections exposed to launch-induced vibration or thermal cycling shall be performed in accordance with [IPC J-STD-001\(S\)](#).
- c. Unless otherwise approved by the Technical Authority, tin-lead (Sn-Pb)-based solders and Sn-Pb part surface finishes (minimum 3% Pb by weight) shall be used for the assembly of electronics hardware intended for critical GSE.

The use of lead-free (Pb-free) solders or Pb-free Sn-based part surface finishes may be allowed when justified by technical need and approved by the Technical Authority. COTS equipment that complies with the Restriction of Hazardous Substances (RoHS) must be evaluated for its intended application, environment, and life cycle. To mitigate the effect of tin whiskers in RoHS-compliant equipment used in critical applications, redundancy should be considered.

- d. For critical GS, the Pb content of solder shall be verified by material certification or by lot sampling.

9.11 Fiber Optics

- a. Fiber-optic cable assemblies, installations, and terminations shall be in accordance with [NASA-STD-8739.5](#) and [KSC-GP-864](#).
- b. Protective caps shall be provided for all fiber-optic connections to GS so that the mating surface is protected.

9.12 Connectors

- a. Electrical multiconductor connectors for GS shall be selected from the following documents: [SAE AS 50151](#), [MIL-DTL-22992](#), [MIL-DTL-24308](#), [MIL-DTL-38999](#), [IEC 60807-1](#), or [KSC-GP-864](#).
- b. Multiconductor connectors in hazardous locations shall be threaded and waterproof.
- c. Coaxial radio frequency (RF) connectors shall be selected from [MIL-PRF-39012](#).
- d. Potting and molding of electrical connectors shall be in accordance with [KSC-STD-132](#) or an equivalent standard approved by the responsible Technical Authority.
- e. Protective covers or caps shall be specified for use with electrical-connector plugs and receptacles in accordance with [KSC-GP-864](#) when they are not connected.

Metallic protection caps should be used during transportation or other potentially damaging handling situations.

Protective covers or caps should

- *protect against moisture intrusion,*
- *protect sealing surfaces, threads, and pins against damage,*
- *resist abrasion, chipping, and flaking,*
- *comply with cleanliness requirements for the plugs and receptacles on which they are used,*
- *consist of material that is compatible with the connector materials,*
- *connect to the cable with a suitable lanyard, chain, or hinge, and*
- *not produce static.*

- f. Covers/caps shall be provided to protect optics.

Optical covers/caps should be easy to install and remove. The covers/caps should be connected with a lanyard, or the equipment should have a designated storage provision.

9.13 Sensors and Transducers

- a. Sensors and transducers used in the design of GS shall be selected using [KSC-NE-9187](#).

Measurement applications that provide visibility only and are not relied upon to control a condition that could damage flight hardware or could create a safety hazard may use COTS components.

- b. If a part is not covered by [KSC-NE-9187](#), it shall be documented with the following minimum information included: commodity, environment, performance, recommended vendor, materials, compatibility, and qualification/acceptance criteria.

9.14 Racks, Panels, and Modular Enclosures

- a. Electronic racks, panels, and enclosures shall be in accordance with [KSC-SPEC-E-0002](#).

Electronic racks, panels, and modular enclosures should conform to the configuration and dimensional requirements of ECA EIA/ECA 310-E.

- b. Purged electrical enclosures in hazardous locations shall be in accordance with [NFPA 496](#).

NFPA 496 contains requirements for the protection of electrical and electronic equipment for installations in hazardous locations recognized by [NFPA 70](#).

- c. Purged electrical enclosures in nonhazardous locations shall be outfitted with purge hardware in accordance with [79K07491](#).

Hardware required for purging enclosures (to maintain low relative humidity and positive pressure) should be selected from [79K07491](#).

9.15 Electromagnetic Relays

- a. Electromagnetic relays shall be hermetically sealed units with continuous duty-rated coils.
- b. Relays shall be selected on the basis of application with regard to operate/release time, pickup/dropout voltage, and coil resistance.

Transient suppression across the relay coil should be considered in order to minimize electromagnetic-interference surges caused by coil inductances.

9.16 Switches

9.16.1 Low Current Switches

Low-current switches (under 1 ampere [A]), shall have a wiping-type operation and gold-plated or silver-plated contacts.

Where units are miniature, sealing is preferred prior to soldering in order to prevent flux contamination.

9.16.2 High Current Switches

High-current switches (over 1 A) shall be industrial-rated, be approved/recognized by Underwriters Laboratory (UL) or another independent test laboratory or military grade.

Arc suppression capacitors, or other transient suppression devices, typically 0.1 μ F at 200% of working AC voltage, are recommended across contacts. Contacts should be silver-plated.

9.16.3 Heavy-Duty Pushbutton or Key Switches

Heavy-duty, high-cycle switches, such as crane pendants and emergency stops, shall be industrial-control type, National Electrical Manufacturer's Association (NEMA) 1-, 12-, or 13-rated.

9.16.4 Rotary Switches

High-current rotary switches shall be of power tap construction with silver-plated contacts.

Rotary switches should be of enclosed construction. Nonshorting types are recommended.

9.16.5 Corrosive or Outdoor Environments

For corrosive or outdoor environments, switches shall be hermetically sealed or provided with other means to ensure a stable, dry environment.

Switches may be MIL-STD-qualified or MIL-PRFqualified of the sealed type, or purged with dry air or GN₂. Wiping contacts also serves to eliminate corrosive buildup.

9.17 Fuses

- a. Fuses shall be approved or recognized by UL.

Slow-blow fuses are preferred where two times the fuse rating has to be used for inductive or higher-current circuits.

- b. Wiring shall be capable of momentary surge currents at the selected fuse capacity.
- c. Fuse rating shall be marked near the fuse holder or blocks and on schematics.

The effects of blown fusing on critical circuit operation are important considerations.

9.18 Circuit Breakers

- a. Circuit breakers shall be used in all electrical power lines carrying over 5 A.

Circuit breakers must be able to interrupt the short-circuit capacity of the circuit to which they are connected; each application must be examined for all its probable uses.

- b. Power circuits shall be protected by companion-trip or common-trip magnetic circuit breakers.
- c. Circuit breakers shall be trip-free.
- d. Medium-voltage circuits (50 V to 120 V; 0.05 A to 20 A) shall be protected by circuit breakers having short-circuit interrupting capacity not exceeding 500 A at 110 VAC.
- e. Circuit breakers shall be protected from environmental conditions that may affect their operation.
- f. Circuit breaker selection and rating shall be in accordance with NFPA 70.

Molded-case breakers are typically used in GSE applications.

9.19 Bus Bars

Bus bars shall be made of copper conforming to [ASTM B152](#).

9.20 Printed Circuit Boards

9.20.1 Printed Circuit Board Design

Rigid, flexible, and rigid-flex printed circuit boards (single, double, metal-core, or multilayer structures) shall meet the design specifications of the following standards, as applicable: [IPC 2221](#) (for critical applications, performance classification 3 shall be used), [IPC 2222](#), [IPC 2223](#), and [IPC 2252](#).

All board types within the [IPC 2221](#) series standard documents are acceptable.

9.20.2 Printed Circuit Board Fabrication and Acceptance

Rigid, flexible, and rigid-flex printed circuit boards (single, double, metal-core, or multilayer structures) shall meet the qualification and performance specifications of the following standards, as applicable: [IPC 6011](#) (for critical applications, performance classification 3 shall be used), [IPC 6012](#) (for critical applications, performance classification 3 shall be used.), [IPC 6013](#), and [IPC 6018](#).

9.20.3 Printed Circuit Assembly Fabrication and Acceptance

- a. Printed circuit assemblies shall be fabricated in accordance with [IPC J-STD-001](#).
- b. Critical printed circuit assemblies exposed to launch-induced vibration or thermal cycling shall be fabricated in accordance with [IPC J-STD-001\(S\)](#).

9.20.4 Conformal Coating

Where electronic circuitry can be damaged or degraded by moisture, dust, chemicals, temperature extremes, mechanical stress, or vibration, conformal coating shall be required in accordance with [NASA-STD-8739.1](#).

When established, requirements for conformal coating should be stated in the design documentation.

9.21 Electric Motors and Generators

Motors and generators used in GS shall be selected in accordance with the system requirements for speed, torque, horsepower, and environment. Motors and generators shall meet the NEMA standards and National Fire Protection Association (NFPA) requirements that govern the classification and general application of motors and generators.

NEMA MG 1 is a comprehensive document that includes the classification, general standards, manufacturing, and test of motors and generators. This document should be used as a guide for specification and selection of GS motors and generators. Another reference and guide is NEMA C50.41. [NFPA 70](#) provides the size of wiring and conduit required for the motor connections.

9.22 Motor Starters and Controllers

Motor starters and controllers shall be in accordance with the type of motor, performance ratings, and type of control required. Enclosures for motor starters and controllers shall meet the environmental requirements for their locations.

NEMA ICS 2, Parts 1 through 9, is a comprehensive document that provides practical information concerning ratings, construction, test, performance, and manufacture of industrial control equipment. NEMA ICS 61800-2 specifies ratings for low-voltage, adjustable-frequency AC power drive systems. [NFPA 70](#) provides the size of wiring and conduit required for the starter/controller connections.

9.23 Electrical Fabrication, Assembly and Installation

- a. Fabrication of electrical GS shall be in accordance with [KSC-E-165](#).
- b. Assembly and installation of electrical GS shall be in accordance with [KSC-E-166](#).

10. CONTROL AND SOFTWARE REQUIREMENTS

10.1 Programmable Logic Controllers

- a. Programmable logic controllers (PLCs) used in GSE shall be in accordance with [IEC 61131-2](#) and [IEC 61131-3](#).
- b. The operation of PLC software and hardware shall allow for various levels of health monitoring and permit configuration of failure modes.
- c. The processor executive shall recognize nonfatal faults and perform predefined tasks to alert the operator.
- d. The hardware shall recognize fatal errors and respond by placing outputs in the predefined failed-safe mode.
- e. The processor executive shall recognize faults with system components and perform defined tasks to safe the failed component and alert operators.

10.2 Software

Software incorporated into the design of GS will meet the requirements of [NPR 7150.2](#).

Software (including COTS software) includes firmware and embedded software (e.g., the software in PLCs and motor controllers). [NPR 7150.2](#) contains provisions applicable to COTS software in NASA-developed systems.

10.3 Security of Information Technology

The design of GS will meet the information technology security requirements specified in [NPR 2810.1](#) and [NPR 7150.2](#).

APPENDIX A. REFERENCE DOCUMENTS

	Handbook of Spring Design from the Spring Manufacturers Institute
AIAA G-095	Guide to Safety of Hydrogen and Hydrogen Systems
ANSI C18.2M, Part 1	American National Standard for Portable Rechargeable Cells and Batteries – General and Specifications
ANSI C18.3M, Part 1	Portable Lithium Primary Cells and Batteries – General and Specifications
ASTM A123	Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153	Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A653	Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A780	Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings
ASTM D5363	Standard Specification for Anaerobic Single-Component Adhesives (AN)
ASTM E2217	Standard Practice for Design and Construction of Aerospace Cleanrooms and Contamination Controlled Areas
ASTM G63	Standard Guide for Evaluating Nonmetallic Materials for Oxygen Service
ASTM G88	Standard Guide for Designing Systems for Oxygen Service
ASTM G94	Standard Guide for Evaluating Metals for Oxygen Service
AWS C3.2M/C3.2	Standard Method for Evaluating the Strength of Brazed Joints
AWS C3.4M/C3.4	Specification for Torch Brazing
AWS C3.5M/C3.5	Specification for Induction Brazing
AWS C3.6M/C3.6	Specification for Furnace Brazing
AWS C3.7M/C3.7	Specification for Aluminum Brazing
ECA EIA/ECA 310-E	Cabinets, Racks, Panels, and Associated Equipment

IEC 62305	Protection Against Lightning, Part 1: General principles, Part 2: Risk management, Part 3: Physical damage to structures and life hazard, and Part 4: Electrical and electronic systems within structures
IEEE 446	Recommended Practice for Emergency and Standby Power Systems for Industrial and Commercial Applications
IEEE 484	Recommended Practice for Installation Design and Installation of Vented Lead-Acid Batteries for Stationary Applications
IEEE 1106	Recommended Practice for Installation, Maintenance, Testing, and Replacement of Vented Nickel-Cadmium Batteries for Stationary Applications
IEEE 1187	Recommended Practice for Installation Design and Installation of Valve-Regulated Lead-Acid Storage Batteries for Stationary Applications
IEST-ST-CC1246	Product Cleanliness Levels—Applications, Requirements, and Determination
ISO 14952	Space systems — Surface cleanliness of fluid systems —
ISO 23309	Microbeam analysis — Quantitative analysis using energy-dispersive spectrometry (EDS) for elements with an atomic number of 11 (Na) or above
JPR 5322.1	Contamination Control Requirements Manual
JSC 29353	Flammability Configuration Analysis for Spacecraft Applications
KDP-P-2713	Technical Review Process
KSC-C-123	Surface Cleanliness of Ground Support Equipment Fluid Systems, Specification for
KSC-STD-E-0012	Facility Grounding and Lightning Protection, Standard for
KSC-STD-G-0003	Launch Support and Facility Components, Qualification of, Standard for
KSC-SPEC-P-0012	Refractory Concrete, Specification for
KSC-SPEC-Z-0007	Tubing, Steel, Corrosion Resistant, Types 304 and 316, Seamless, Annealed, Specification for

KTI-5210	Material Selection List for Oxygen Service
KTI-5212	Material Selection List for Plastic Films, Foams, and Adhesive Tapes
MIL-HDBK-149	Rubber
MMA-1985-79	Standard Test Method for Evaluating Triboelectric Charge Generation and Decay
MSFC-SPEC-164	MSFC Technical Standard: Cleanliness of Components for Use in Oxygen, Fuel, and Pneumatic Systems, Specification For
MSFC-SPEC-445	Adhesive Bonding, Process and Inspection, Requirements for
MSFC-STD-486	Standard, Threaded Fasteners, Torque Limits for
NASA/CR-2005-213424	Lubrication for Space Applications
NASA-HDBK-4008	Programmable Logic Devices (PLD) Handbook
NASA-RP-1228	Fastener Design Manual
NASA/TM-2007-213740	Guide for Oxygen Compatibility Assessments on Oxygen Components and Systems
NASA-TM-86556	Lubrication Handbook for the Space Industry, Part A: Solid Lubricants, Part B: Liquid Lubricants
NEMA C50.41	Polyphase Induction Motors for Power Generating Stations
NEMA ICS 2	Industrial Control and Systems Controllers, Contactors and Overload Relays Rated 600 Volts
NEMA ICS 61800-2	Adjustable Speed Electrical Power Drive Systems, Part 2: General requirements – Rating specifications for low voltage adjustable frequency a.c. power drive systems
NEMA MG 1	Motors and Generators
SAE AMS 2488	Anodic Treatment – Titanium and Titanium Alloys Solution pH 13 or Higher
SAE AMS 2460	Chromium Plating
SAE AMS 2175	Castings, Classification and Inspection of
SAE AMS 2770	Heat Treatment of Wrought Aluminum Alloy Parts

SAE AMS 2771	Heat Treatment of Aluminum Alloy Castings
SAE AMS 2772	Heat Treatment of Aluminum Alloy Raw Materials
SAE AMS-H-81200	Heat Treatment of Titanium and Titanium Alloys
SAE AMS-QQ-P-416	Plating, Cadmium (Electrodeposited)
SAE AMS-STD-595	Colors Used in Government Procurement
SAE ARP 1176	Oxygen System and Component Cleaning
SSP 50004	Ground Support Equipment Design Requirements: International Space Station
SW-E-0002	Ground Support Equipment General Design Requirements: Space Shuttle
TM-584	Corrosion Control and Treatment Manual

APPENDIX B. GROUND SYSTEM IDENTIFICATION SYSTEM COLORS

The listed color chip numbers are from SAE AMS-STD-595. Actual colors used for GS may be the commercially available color closest to the listed color chip number.

Application	Color	Color Chip Number
Electrical/electronic, hydraulic, and pneumatic consoles, racks, and cabinets	Gray	26440 or 26251
Structural steel/aluminum	Gray	16187 or 16473
Remove-before-flight items, safety equipment, and protective equipment	Red	11105 or 21105
White room or clean room equipment, storage vessels when solar heat transfer is a concern	White	17875 or 27875
Panel lettering	Black	37038
Handling and transportation equipment	Yellow or White	13538 (yellow) 17875 or 27875 (white)
Control racks and consoles	Blue	25102
Connections and interfaces for hypergolic fuel servicing (see MIL-STD-101 for color coding of piping systems)	Yellow Brown Band (optional)	13655 (yellow) 10080 (brown)
Connections and interfaces for hypergolic oxidizer servicing (see MIL-STD-101 for color coding of piping systems)	Green Brown Band (optional)	14110 (green) 10080 (brown)

This page was intentionally left blank.

APPENDIX C. GS DOCUMENTATION DELIVERABLES

- C.1 The GS provider is responsible for submitting documentation to verify that the hardware/software has been developed in accordance with this standard.
- C.2 The GS provider is responsible for providing all the necessary documentation to the using organization when the GS is delivered for use, regardless of who “owns” the GS at the time of delivery. Examples of this documentation include the following:
- Certification Approval Request (indicates how the GS was certified as complying with this standard)
 - Design Verification Matrix (indicates which GS requirements were met and how)
 - Material Inspection and Receiving Report
 - Software Version Description Document
 - Validation and verification compliance records
 - Facility and flight vehicle interface requirements
 - Drawings with parts list or bills of material
 - Firmware Version Description Document
 - Maintenance manuals/procedures
 - Material certifications and lot traceability
 - Hazard Analyses or Ground Safety Data Pack
 - Failure Modes, Effects, and Criticality Analysis
 - Operating manuals/procedures
 - Critical Items List

Intent/Rationale: The using organization requires documentation for safely operating, maintaining, and servicing the GS. To reduce risk to the mission, ground personnel, and flight crews, a Failure Modes and Effects Analysis should be completed and submitted in accordance with the criticality assigned to the GS by the responsible program or project. KDP-P-2713 lists typical documentation requirements.

This page was intentionally left blank.

APPENDIX D. PRESSURE VESSELS AND SYSTEMS

In cases where [NASA-STD-8719.17](#) does not specify a voluntary consensus standard, PVS is considered qualified for service if it meets the following requirements:

D.1 Pressure Vessels

Pressure vessels shall meet **one** of the following requirements:

- [ASME BPVC-VIII](#), Division 1 or 2
- DOT
- [EU 97/23/EC](#)

D.2 Pipe, Tubing, and Associated fittings

Components shall meet **all** of the following requirements:

- Stress under the maximum pressure does not exceed one-third of the minimum tensile strength in the design temperature range.
- Stress under the maximum pressure does not exceed two-thirds of the minimum yield strength in the design temperature range.
- Welds have 5% random inspection, using radiography or ultrasound, and are inspected in accordance with ASME standards.
- The allowable stress of welded pipe, tubing, fittings, and joint do not exceed 80% of the material allowable stress (one-third of ultimate strength or two-thirds of yield strength at temperature).

This requirement is consistent with ASME B31.3 allowable stress with a joint efficiency factor of 0.8 (80%).

D.3 Components

Components other than relief valves or burst discs shall meet **all** of the following:

- The component is COTS and manufactured by a reputable manufacturer.
- The manufacturer has a successful history of providing the identical or similar components to KSC, NASA, or NASA contractors.

“Successful history” is NASA or NASA contractor experience without structural failures for the service life of a fluid system or the length of the program supported by the system. Alternatively, “successful history” is successful experience used in support of NASA programs by commercial entities.

- The component has a 4:1 ratio of manufacturer's rated burst pressure to system design pressure (MAWP for [ASME BPVC-VIII](#)).
- If the component is rated for a burst pressure ratio less than 4, the component is derated to a new design pressure of one-fourth of the manufacturer's burst pressure rating.
- Brittle materials or cast iron covered by [ASME BPVC-VIII](#), Division 1, Part UCI require a factor of 10:1 against rated burst pressure.
- The pressure boundary of the component is made from materials listed in [ASME B31.1](#) or [ASME BPVC-II](#).
- The component is used only under conditions of pressure, temperature, humidity, vibration, etc., that meet the manufacturer's ratings or that have been tested by KSC, NASA, or NASA contractor for the same or similarly proportioned components of the same or like material.
- Flexible hoses are used below one-fourth of the manufacturer's rated burst pressure.

D.4 Relief Valves and Burst Discs

D.4.1 Relief Valves and Burst Discs for Pressure Vessels

Relief valves and burst discs used to protect pressure vessels shall meet [ASME BPVC-VIII](#), Division 1, including the required "UV" stamp.

D.4.2 Relief Valves and Burst Discs for Systems

Relief valves and burst discs used to protect piping systems and components shall meet **one** of the following:

- [ASME B31.1](#), Power Piping
- [ASME B31.3](#), Process Piping
- [ISO 4126](#), Safety devices for protection against excessive pressure

D.5 Testing

Completed systems shall either be hydrostatically tested to 150% of MAWP or be pneumatically tested to 110% of MAWP.

D.6 Qualification of Components by Pressure Test

Components may be qualified for use by a pressure test under the following conditions:

- If the materials of manufacture are known and are ductile (over 5% elongation at failure), then the component may be used at one-fourth of the test pressure.
- If the materials of manufacture are unknown or are brittle (less than 5% elongation at failure), then the component may be used at one-tenth of the test pressure.